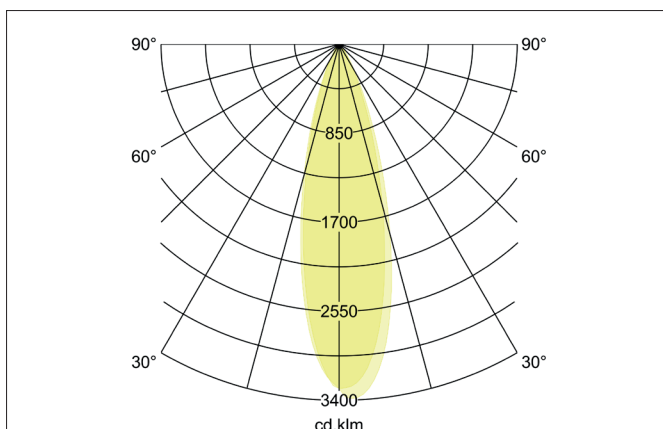
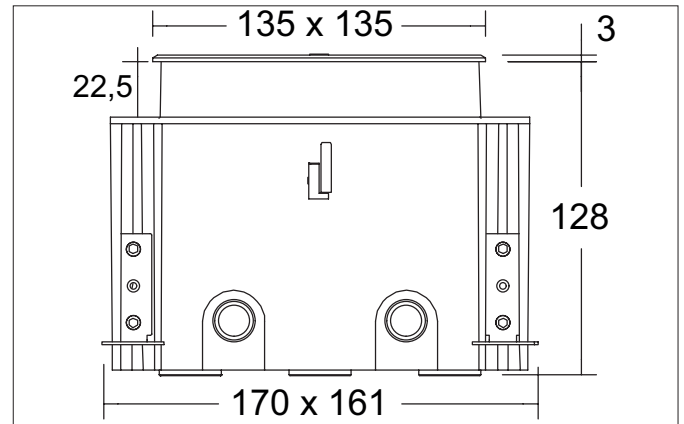



LANKO-S LED recessed floor light, V4A, IP67, switchable

Article no. 14695083


Tender

LED recessed floor light, V4A, IP67, switchable, Angular. Ceiling cut-out L x W 161 x 170 mm, Installation depth 128 mm, Length 135 mm, Width 135 mm, Weight 1,643 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover glass transparent. Luminous flux 920 lm, Power 1 x 8 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 50.000 h, , Colour: black, Permissible ambient temperature (ta): -20 to +45°C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP67, shock resistance according to IEC62262: IK08 .With electronic driver, on/off switchable.

Product Benefits

- Lens can be tilted 30° in both directions.


LANKO-S LED recessed floor light, V4A, IP67, switchable

Article no. 14695083

Article data	
Article no.	14695083
GTIN	4255752501497
Series name	LANKO-S
Short description	LED recessed floor light, V4A, IP67, switchable
Colour	black
Shape	Angular
Length	135 mm
Width	135 mm
Built-in length	161 mm
Built-in width	170 mm
Installation depth	128 mm
Scope of delivery	incl. converter for connection to 230 V mains voltage, switchable, floor installation pot and 1,000 mm connection cable.
Weight	1.643 kg
Length of the connection line	1,000 mm
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K
Light colour	white
Light output	Direct
Luminous flux	920 lm
System efficiency	115 lm/W
Colour rendering	CRI > 80
Beam angle	30°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	8 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP67
Ambient temperature	-20 to +45 °C
Dimmable	No
Control	on/off
Length of the connection line	1,000 mm
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h
Energy efficiency class	not required


LANKO-S LED recessed floor light, V4A, IP67, switchable
 Article no. 14695083

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Floor-mounted
Adjustability	Pivoted
Swivel angle	30°
Rotation angle	30°
Max. load	1,000 kg
Over rollable	No
Impact resistance	IK08
Material cover	Glass transparent
Circlip	Without circlip
Suitable for through-wiring	Yes

Packing data	
Gross weight	1.859 kg
Length of packaging	205 mm
Packaging width	205 mm
Packaging height	160 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.