



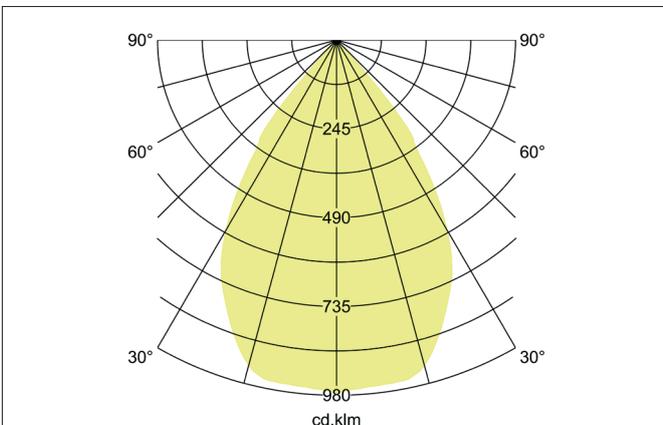

**KACIE MINI LED Surface-mounted downlight, DALI dimmable**  
Article no. 12595174DA

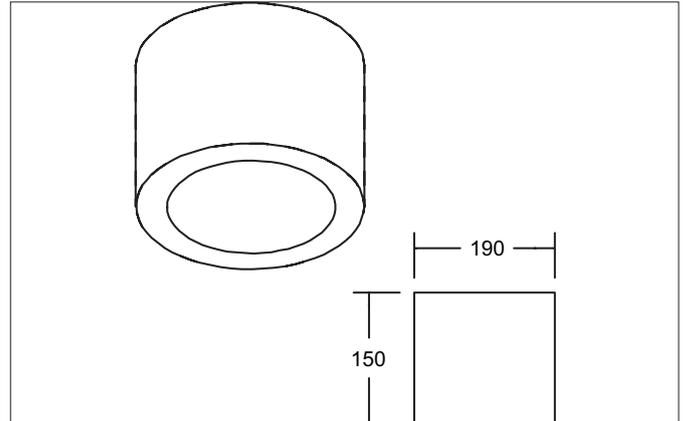

**Tender**  
LED Surface-mounted downlight, DALI dimmable, Round. Luminaire diameter 190.0 mm, Height 150.0 mm Weight 1.751 kg, Reflector silver with rotationssymmetrical, deep, wide distributed light intensity.. Luminous flux 3.541 lm, UGR < 20, Power 1 x 31 W, Light colour neutral white, Correlated color temprature (CCT) 4.000 K, Colour rendering index CRI > 90, Rated life time L70/B10 at 25 °C: 50.000 h, Rated life time L70/B50 at 25 °C: 50.000 h, Housing material: Aluminium / Plastic, Colour: white structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61 140): I, Degree of protection (DIN EN 60529): IP20. With electronic driver, DALI-2 dimmable.

**Product Benefits**

- Round surface-mounted downlight made of solid aluminum with generously dimensioned heat management.
- High-quality reflector.
- Simple installation.
- CRI > 90, UGR < 20.
- Available in switchable and DALI dimmable versions.


**KACIE MINI LED Surface-mounted downlight, DALI dimmable**

Article no. 12595174DA

Article data	
Article no.	12595174DA
GTIN	4251433999690
Series name	KACIE MINI
Short description	LED Surface-mounted downlight, DALI dimmable
Material	Aluminium / Plastic
Colour	white structure
Type of surface	Structure
Shape	Round
Outer diameter	190 mm
Hight	150 mm
Scope of delivery	incl. converter for connection to 230 V mains voltage, DALI-2 dimmable
Weight	1.751 kg
D licence plate	No
Conformance	CE, UKCA

Lighting technology	
Colour temperature	4.000 K
Light colour	white
Light output	Direct
Luminous flux	3,541 lm
System efficiency	114 lm/W
Colour rendering	CRI > 90
Reflector	Faceted
Reflector colour	silver
Beam angle	70°
Glare evaluation	UGR < 20
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	31 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Protection class	I
Degree of protection	IP20
Dimmable	Yes
Control	DALI-2
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h
Energy efficiency class	not required

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Material cover	Without cover



**KACIE MINI LED Surface-mounted downlight, DALI dimmable**  
Article no. 12595174DA

Packing data	
Gross weight	1.938 kg
Length of packaging	195 mm
Packaging width	190 mm
Packaging height	215 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>