




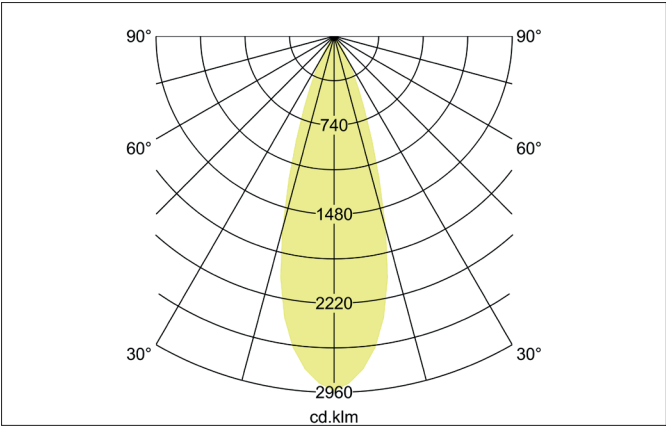

**MINI LED track spotlight, rotatable and pivotable, DALI dimmable**  
Article no. 88393183DA

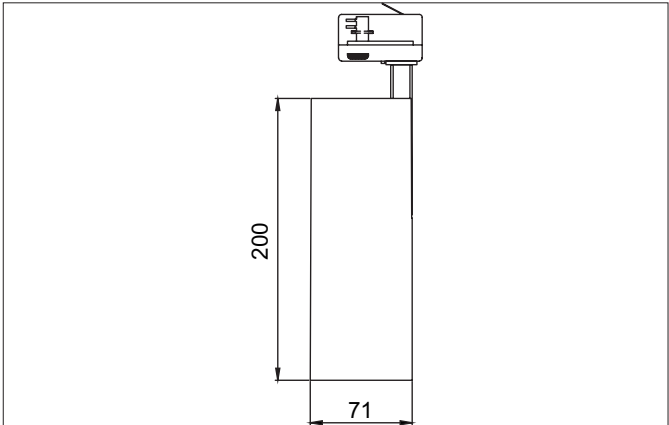

| Tender                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| LED track spotlight, rotatable and pivotable, DALI dimmable, Round.Luminaire diameter 71.0 mm, Hight 200.0 mm Weight 0.839 kg,Reflector silver with rotattionssymmetrical, deep, wide distributed light intensity. Cover glass transparent. Luminous flux 2.686 lm, Power 1 x 23 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 90, Rated life time L80/B10 at 25 °C: 50.000h h, Housing material: Aluminium, Colour: black structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20. With electronic driver, DALI dimmable. |  |

| Article data      |                                                             |
|-------------------|-------------------------------------------------------------|
| Article no.       | 88393183DA                                                  |
| GTIN              | 4255752504351                                               |
| Series name       | MINI                                                        |
| Short description | LED track spotlight, rotatable and pivotable, DALI dimmable |
| Material          | Aluminium                                                   |
| Colour            | black structure                                             |
| Type of surface   | Structure                                                   |
| Shape             | Round                                                       |
| Outer diameter    | 71 mm                                                       |
| Length            | 71 mm                                                       |
| Width             | 71 mm                                                       |
| Hight             | 200 mm                                                      |
| Weight            | 0.839 kg                                                    |
| Conformance       | UKCA                                                        |


**MINI LED track spotlight, rotatable and pivotable, DALI dimmable**

Article no. 88393183DA

| Lighting technology          |            |
|------------------------------|------------|
| Colour temperature           | 3.000 K    |
| Light colour                 | white      |
| Luminous flux                | 2,686 lm   |
| System efficiency            | 117 lm/W   |
| Colour rendering             | CRI > 90   |
| Reflector                    | High-gloss |
| Reflector colour             | silver     |
| Beam angle                   | 36°        |
| Light sharing                | Symmetric  |
| Adjustable color temperature | No         |

| Operating technology of the luminaire |                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| System output                         | 23 W                                                                                                                                                     |
| Voltage type                          | AC                                                                                                                                                       |
| AC nominal voltage max                | 230 V                                                                                                                                                    |
| Frequency max                         | 50 Hz                                                                                                                                                    |
| Lamp                                  | LED                                                                                                                                                      |
| Lamp holder                           | Without fitting                                                                                                                                          |
| Protection class                      | I                                                                                                                                                        |
| Degree of protection                  | IP20                                                                                                                                                     |
| Control                               | DALI                                                                                                                                                     |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L80/B10 at 25 °C      | 50.000h h                                                                                                                                                |
| Energy efficiency class               | not required                                                                                                                                             |

| Mounting technology         |                               |
|-----------------------------|-------------------------------|
| Mounting method             | Surface mounting              |
| Place of installation       | Ceiling-mounted               |
| Adjustability               | Rotatable and adjustable head |
| Swivel angle                | 180°                          |
| Rotation angle              | 350°                          |
| Head adjustable angle       | 180°                          |
| Material cover              | Glass transparent             |
| Suitable for through-wiring | No                            |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.968 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 295 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging width         | 120 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging height        | 170 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |