




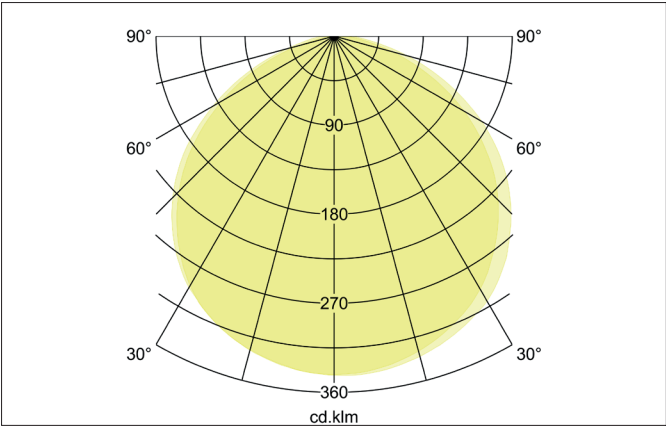

**COATIS LED surface-mounted wall light, IP65, switchable**  
Article no. 10222103

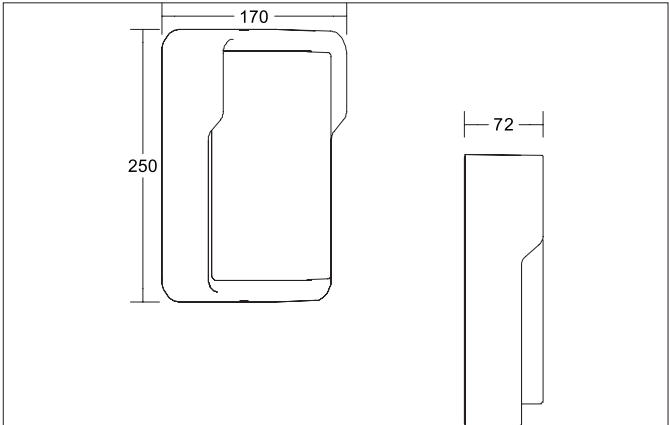

**Tender**  
LED surface-mounted wall light, IP65, switchable, Rectangular., Hight 72.0 mm Weight 1.26 kg, with rotattionssymmetrical, deep, wide distributed light intensity.Luminous flux 825 lm, Power 1 x 12 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Aluminium, Colour: graphite structure, Permissible ambient temperature (ta): -20 °C up to +45 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP65, shock resistance according to IEC62262: IK08 .With electronic driver, on/off switchable.

| Article data      |                                                                   |
|-------------------|-------------------------------------------------------------------|
| Article no.       | 10222103                                                          |
| GTIN              | 4255752500292                                                     |
| Series name       | COATIS                                                            |
| Short description | LED surface-mounted wall light, IP65, switchable                  |
| Material          | Aluminium                                                         |
| Colour            | graphite structure                                                |
| Type of surface   | Structure                                                         |
| Shape             | Rectangular                                                       |
| Hight             | 72 mm                                                             |
| Scope of delivery | incl. converter for connection to 230 V mains voltage, switchable |
| Weight            | 1.26 kg                                                           |
| D licence plate   | No                                                                |
| Conformance       | CE, UKCA                                                          |


**COATIS LED surface-mounted wall light, IP65, switchable**

Article no. 10222103

| Lighting technology          |             |
|------------------------------|-------------|
| Colour temperature           | 3.000 K     |
| Light colour                 | white       |
| Light output                 | Direct      |
| Luminous flux                | 825 lm      |
| System efficiency            | 69 lm/W     |
| Colour rendering             | CRI > 80    |
| Luminaire optics             | Cover satin |
| Beam angle                   | 113°        |
| Light sharing                | Symmetric   |
| Adjustable color temperature | No          |

| Operating technology of the luminaire |                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| System output                         | 12 W                                                                                                                                                     |
| Voltage type                          | AC                                                                                                                                                       |
| AC nominal voltage max                | 230 V                                                                                                                                                    |
| Frequency max                         | 50 Hz                                                                                                                                                    |
| Frequency min                         | 50 Hz                                                                                                                                                    |
| Lamp                                  | LED                                                                                                                                                      |
| Lamp holder                           | Without fitting                                                                                                                                          |
| Protection class                      | I                                                                                                                                                        |
| Degree of protection                  | IP65                                                                                                                                                     |
| Ambient temperature                   | -20°C up to +45°C                                                                                                                                        |
| Dimmable                              | No                                                                                                                                                       |
| Control                               | on/off                                                                                                                                                   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Energy efficiency class               | not required                                                                                                                                             |

| Mounting technology         |                  |
|-----------------------------|------------------|
| Mounting method             | Surface mounting |
| Place of installation       | Wall-mounted     |
| Adjustability               | Not adjustable   |
| Impact resistance           | IK08             |
| Suitable for through-wiring | No               |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 1.46 kg                                                                                                                                                                                                                                                                                                                                                                        |
| Length of packaging     | 175 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging width         | 95 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging height        | 265 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |