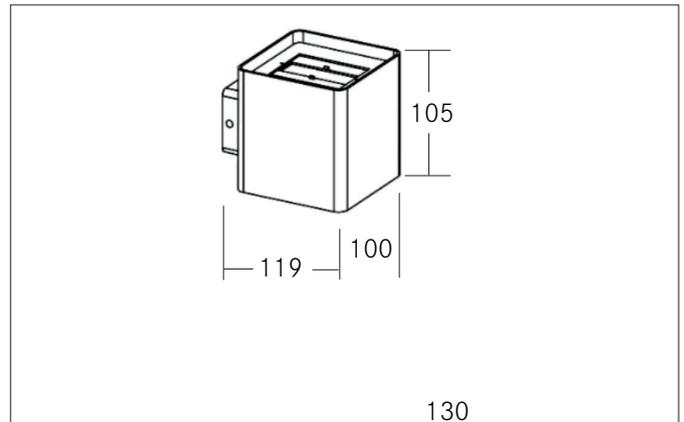



SITTA LED wall surface mounted luminaire, IP54

Article no. 65091103


Tender

LED wall surface mounted luminaire, IP54, Rectangular. Luminaire length 119.0 mm, Luminaire width 100.0 mm, Height 105.0 mm Weight 0.86 kg, Cover glass transparent Luminous flux 1.200 lm, Power 2 x 7 W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Aluminium / Glass, Colour: graphite structure, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP54. With electronic driver, on/off switchable.

Product Benefits

- Abstrahlwinkel fokussierbar, oben und unten.

| Article data | |
|-------------------|---|
| Article no. | 65091103 |
| GTIN | 4251433982968 |
| Series name | SITTA |
| Short description | LED wall surface mounted luminaire, IP54 |
| Material | Aluminium / Glass |
| Colour | graphite structure |
| Type of surface | Structure |
| Shape | Rectangular |
| Length | 119 mm |
| Width | 100 mm |
| Height | 105 mm |
| Scope of delivery | incl. converter for connection to 230 V mains voltage, switchable |
| Weight | 0.86 kg |
| D licence plate | No |
| Conformance | CE, UKCA |


SITTA LED wall surface mounted luminaire, IP54

Article no. 65091103

| Lighting technology | |
|------------------------------|-----------------|
| Colour temperature | 3.000 K |
| Light colour | white |
| Light output | Direct/Indirect |
| Luminous flux | 1,200 lm |
| System efficiency | 86 lm/W |
| Colour rendering | CRI > 80 |
| Beam angle | 120° |
| Adjustable color temperature | No |

| Operating technology of the luminaire | |
|---------------------------------------|--|
| System output | 14 W |
| Voltage type | AC |
| AC nominal voltage max | 230 V |
| Frequency max | 50 Hz |
| Frequency min | 50 Hz |
| Lamp | LED |
| Lamp holder | Without fitting |
| Protection class | I |
| Degree of protection | IP54 |
| Dimmable | No |
| Control | on/off |
| Bulb change possible | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Energy efficiency class | not required |

| Mounting technology | |
|-----------------------------|-------------------|
| Mounting method | Surface mounting |
| Place of installation | Wall-mounted |
| Adjustability | Not adjustable |
| Further references | Outdoor |
| Material cover | Glass transparent |
| Suitable for through-wiring | No |

| Packing data | |
|-------------------------|---|
| Gross weight | 1.01 kg |
| Length of packaging | 200 mm |
| Packaging width | 150 mm |
| Packaging height | 150 mm |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |