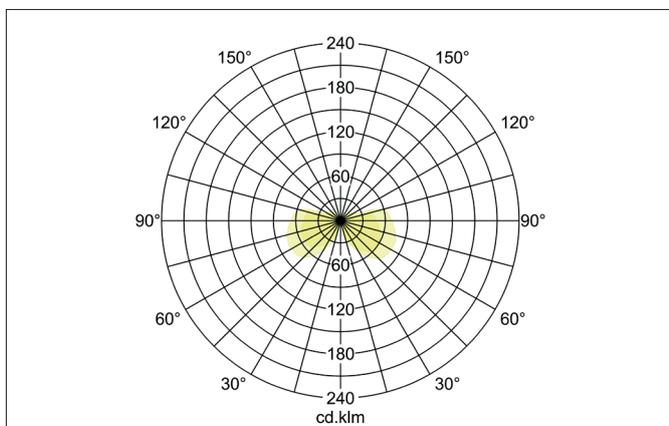
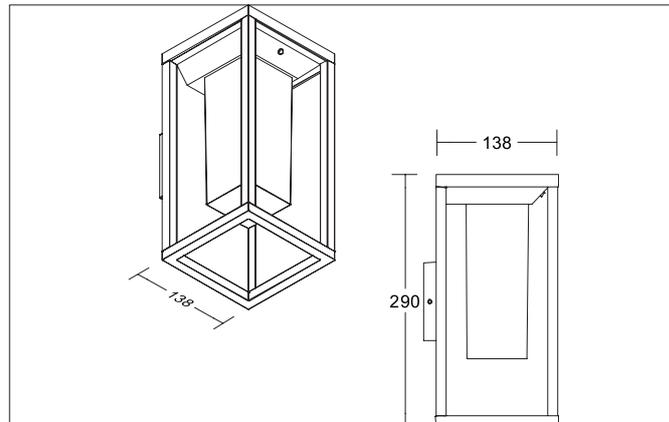



**RUBI LED solar wall surface-mounted luminaire, IP54**

Article no. 65322103


**Tender**

Surface-mounted LED solar wall light, IP54, switchable, luminaire length 138 mm, luminaire width 138 mm, height 290 mm, weight 2.081 kg, with rotationally symmetrical narrow-wide beam light distribution. Rated luminous flux 167 lm, rated wattage 1 x 2.2 W, light color warm white to warm white, most similar color temperature (CCT) 3,000 - 3,000 K, general color rendering index CRI > 80, housing material: aluminum / glass / plastic, color: graphite structure, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): III, degree of protection (DIN EN 60529): IP54. For direct connection to mains voltage, switchable.

**Product Benefits**

1 x 2.200 mA Lithium Batterie.

Ladezeit: Sonne: 6 - 8 Std.

Arbeitszeit: 2 - 3 Std. bei 100% Leistung.

Arbeitszeit: 20 - 25 Std. bei 15% Leistung.

Umgebungshelligkeit < 20 lux: Sensor an.

Umgebungshelligkeit > 20 - 39 lux: Sensor aus / Batterie lädt (abhängig von der Sonnenstrahlung).


**RUBI LED solar wall surface-mounted luminaire, IP54**

Article no. 65322103

Article data	
Article no.	65322103
GTIN	4251433982654
Series name	RUBI
Short description	LED solar wall surface-mounted luminaire, IP54
Material	Aluminium / Glass / Plastic
Colour	graphite structure
Type of surface	Structure
Shape	Rectangular
Length	138 mm
Width	138 mm
Hight	290 mm
Weight	2.081 kg
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K
Light colour	white
Light output	Direct
Luminous flux	167 lm
System efficiency	76 lm/W
McAdam-Step	McAdam-Step 6
Colour rendering	CRI > 80
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	2.2 W
Voltage type	DC
AC nominal voltage max	230 V
DC nominal voltage max	3.7 V
Lamp	LED
Lamp holder	Without fitting
Protection class	III
Degree of protection	IP54
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Energy efficiency class	not required

Mounting technology	
Mounting method	Surface mounting
Place of installation	Wall-mounted
Adjustability	Not adjustable
Further references	Outdoor
Suitable for through-wiring	No

Packing data	
Gross weight	2.511 kg
Length of packaging	530 mm
Packaging width	200 mm
Packaging hight	200 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.