

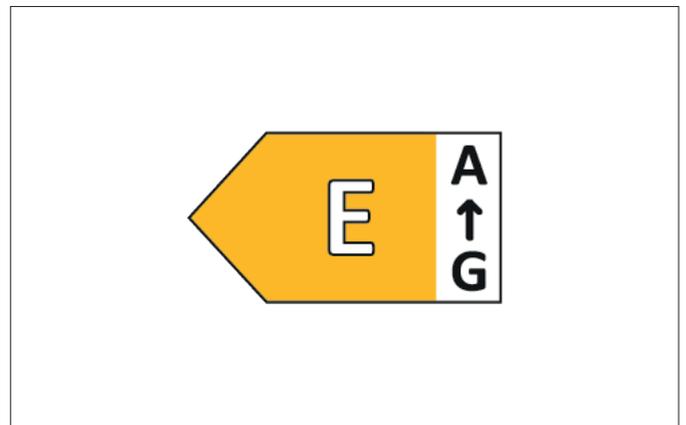
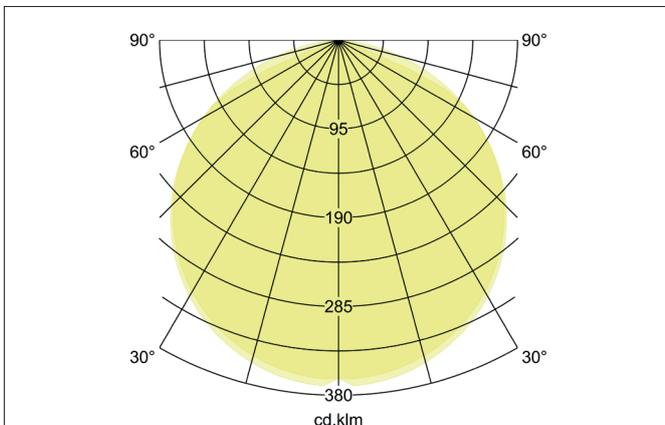


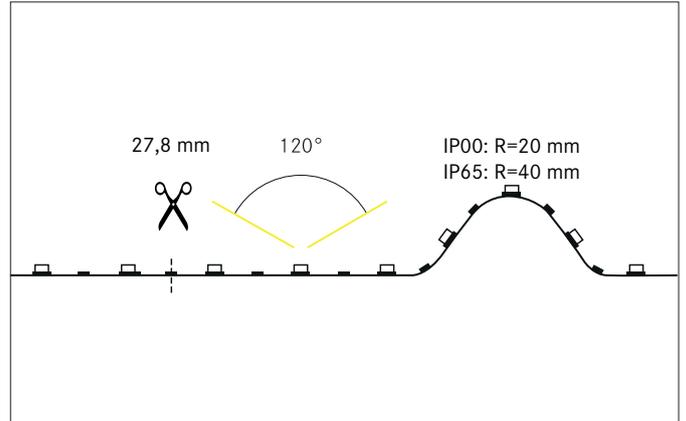

QUALITYFLEX COB-Vision LED flex lighting COB TunableWhite, 5 m, CRI > 90, 15 W / m, IP00
Article no. 15316004

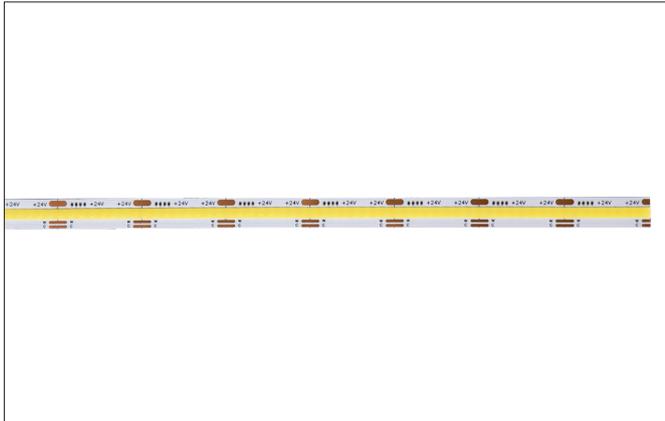

Tender
LED flex lighting COB TunableWhite, 5 m, CRI > 90, 15 W / m, IP00, white, Light colour: white, 6.500K-2.000K, CRI > 90. Length: 5000 mm . Lamp power per meter: 15.0 W/m, Degree of protection: IP00, Protection class: III, Voltage: 24V DC, Beam angle: 120.0 °, 576 LEDs per meter, Chip distance (Short Pitch) : 1,74mm. For individual application, the LED flex board can be used all 27,8 mm be cut back. The maximum system length of 5.000 mm must not be exceeded with one feed-in.

Product Benefits

- TunableWhite chip-on-board LED assembly for homogeneous light image.
- Compatible with our TunableWhite LED insert 12843004.
- With 2-channel dimming, color temperature and brightness can be changed.
- Optimal controllable via DALI (DT8) or TunableWhite wireless remote control.
- Protection class: IP00
- Colour temperature: 2,000 Kelvin to 6,500 Kelvin.
- Beam angle: 120°.
- High colour rendering with CRI>90.



QUALITYFLEX COB-Vision LED flex lighting COB TunableWhite, 5 m, CRI > 90, 15 W / m, IP00
Article no. 15316004

Article data	
Article no.	15316004
GTIN	4251433955009
Series name	QUALITYFLEX COB-Vision
Short description	LED flex lighting COB TunableWhite, 5 m, CRI > 90, 15 W / m, IP00
Colour	white
Length	5,000 mm
Width	10 mm
Hight	2 mm
Scope of delivery	incl. 1 x mounting instructions, 5 x identification labels
Weight	0.12 kg
Length of the connection line	500 mm
Conformance	CE, UKCA

Lighting technology	
Colour temperature	2.000 K - 6.500 K
Light colour	white
Color Temperature 1	2,000 K
Color Temperature 2	6,500 K
Luminous flux	700 - 825 lm/m
Luminous flux 1	700 lm/m
Luminous flux 2	825 lm/m
System efficiency	55 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 90
Beam angle	120°
Adjustable color temperature	Infinite control

Operating technology of the luminaire	
System output	75 W
Lamp power per meter	15 W/m
Voltage type	DC
DC nominal voltage max	24 V
Lamp	LED
Protection class	III
Degree of protection	IP00
Ambient temperature	-10 °C up to +40 °C
Dimmable	Yes
Wire number	3
Control	Depending on driver
Length of the connection line	500 mm
Cable assignment	red = + pole yellow = - pole Warm white white = - pole cold white
Design of the connecting cable	both sides
Bulb change possible	No
Rated life time L70/B50 at 25 °C	52,000 h
Rated life time L80/B10 at 25 °C	30.000 h
Energy efficiency class	E



QUALITYFLEX COB-Vision LED flex lighting COB TunableWhite, 5 m, CRI > 90, 15 W / m, IP00
Article no. 15316004

Operating technology of QualityFlex	
Power per meter	15 W/m
Short Pitch	1.74 mm
Number of lamps per meter	576 Qty
Length of individual sections	27.8 mm
Smallest bend radius	20 mm
Control	Negative (3-core)
Length	5,000 mm
Maximum module length	5,000 mm
Circuit type	Parallel conduction
LED Type	COB-LED

Packing data	
Gross weight	0.145 kg
Length of packaging	210 mm
Packaging width	200 mm
Packaging height	20 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>

Compatible Driver						
Article no.						
17206000						
17207000						
17214000						
17223000						
17224000						
17225000						
17226000						
17227000						
17228000						
17240000	1 W	20 W	on/off	150 mm	40 mm	30 mm
17241000	1 W	40 W	on/off	210 mm	40 mm	30 mm
17242000	1 W	60 W	on/off	250 mm	40 mm	30 mm
17243000	1 W	120 W	on/off	300 mm	40 mm	30 mm
17244000	1 W	150 W	on/off	310 mm	40 mm	30 mm
17260000						


QUALITYFLEX COB-Vision LED flex lighting COB TunableWhite, 5 m, CRI > 90, 15 W / m, IP00

Article no. 15316004

Compatible Controller						
Article no.	Power min	Power	Control	Length	Width	Height
18151000	1 W	240 W	KNX	170 mm	59 mm	30 mm
18152000	1 W	240 W	DALI-DT6	170 mm	59 mm	30 mm
18153000	1 W	240 W	DMX	170 mm	59 mm	30 mm
18154000	1 W	240 W	1-10 V	170 mm	59 mm	30 mm
18155000	1 W	240 W	DALI-2	170 mm	59 mm	30 mm
18156000			1-10 V	167 mm	51 mm	23 mm
18157000	1 W	240 W	ZigBee	145 mm	46.5 mm	16 mm
18161000	1 W	240 W	KNX	72 mm	90 mm	70 mm
18162000	1 W	240 W	DALI-DT6	54 mm	110 mm	66 mm
18164000	1 W	240 W	1-10 V	54 mm	110 mm	66 mm
18165000	1 W	240 W	DALI-2	54 mm	110 mm	66 mm
17518000	0 W	240 W	Wireless technology control			
18192000	1 W	240 W	Wireless technology control	160 mm	45 mm	18 mm
17290000	1 W	100 W	DALI-2	244 mm	64 mm	32 mm
17291000	1 W	200 W	DALI-2	330 mm	79 mm	39 mm



QUALITYFLEX COB-Vision LED flex lighting COB TunableWhite, 5 m, CRI > 90, 15 W / m, IP00
Article no. 15316004

Compatible Profiles				
Short description				
Recessed profile 53654070				
LED recessed profile 53759070				
Wall recessed profile 53650260				
Plaster profile 53655070				
Plaster profile 53656070				
Surface-mounted profile 53600070				
Surface-mounted profile 53602070				
Surface-mounted profile 53603070				
LED surface-mounted profile 53606070				
Surface-mounted profile 53607080				
Surface-mounted profile, flat 53380261				
Surface-mounted profile, high 53381302				
Surface-mounted corner profile 53700070				
Surface-mounted corner profile 53702070				
Surface-mounted corner profile 53703260				
Surface-mounted corner profile 53385261				
Flexible profile 53753260				
Wall surface-mounted profile 53754070				
Wall surface-mounted profile 53751260				
Flat profile P76-16 53756070				
Surface-mounted round profile 53760260				