




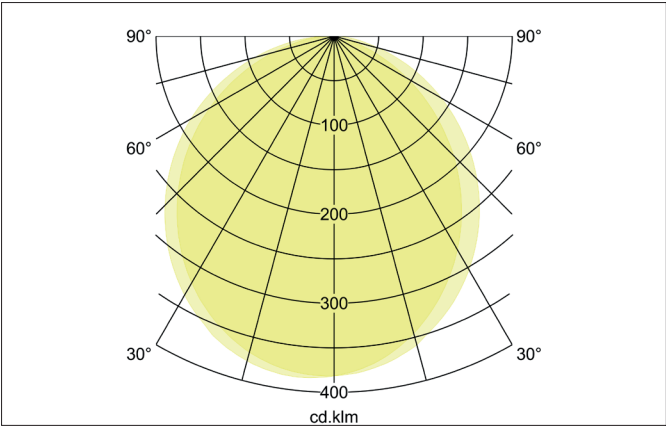

**EYE LED wall surface mounted luminaire, IP65**  
Article no. 10037173

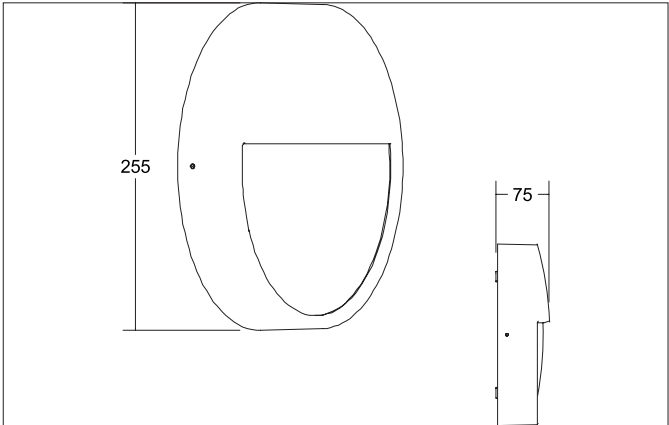

**Tender**

Surface-mounted LED wall light, IP65, 3CCT, switchable, luminaire diameter 255 mm, height 75 mm, weight 1.435 kg, with rotationally symmetrical narrow-wide beam light distribution. Opal plastic cover, rated luminous flux 880 lm, rated wattage 1 x 12 W, light color warm white to daylight white, most similar color temperature (CCT) 3,000 - 5,700 K, general color rendering index CRI > 80, service life L70/B50 at 25 °C: 50,000 h, housing material: aluminum / plastic, color: white structure, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): I, degree of protection (DIN EN 60529): IP65, degree of impact resistance according to IEC62262: IK10. For connection to an external control gear, which is not included with the luminaire. switchable.

| Article data      |                                                                              |
|-------------------|------------------------------------------------------------------------------|
| Article no.       | 10037173                                                                     |
| GTIN              | 4251433971832                                                                |
| Series name       | EYE                                                                          |
| Short description | LED wall surface mounted luminaire, IP65                                     |
| Material          | Aluminium / Plastic                                                          |
| Colour            | white structure                                                              |
| Type of surface   | Structure                                                                    |
| Shape             | Round                                                                        |
| Outer diameter    | 255 mm                                                                       |
| Hight             | 75 mm                                                                        |
| Scope of delivery | Incl. converter for connection to the 230-V mains voltage, on/off switchable |
| Weight            | 1.435 kg                                                                     |
| Conformance       | CE, UKCA                                                                     |


**EYE LED wall surface mounted luminaire, IP65**

Article no. 10037173

| Lighting technology          |                             |
|------------------------------|-----------------------------|
| Colour temperature           | 3.000 K / 4.000 K / 5.700 K |
| Light colour                 | white                       |
| Color Temperature 1          | 3,000 K                     |
| Light output                 | Direct                      |
| Luminous flux                | 880 lm                      |
| Luminous flux 1              | 880 lm                      |
| System efficiency            | 73 lm/W                     |
| Colour rendering             | CRI > 80                    |
| Luminaire optics             | Cover satin                 |
| Reflector                    | Without                     |
| Beam angle                   | 110°                        |
| Light sharing                | Symmetric                   |
| Adjustable color temperature | Stages                      |

| Operating technology of the luminaire |                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| System output                         | 12 W                                                                                                                                                     |
| Voltage type                          | AC                                                                                                                                                       |
| AC nominal voltage max                | 230 V                                                                                                                                                    |
| Frequency max                         | 50 Hz                                                                                                                                                    |
| Frequency min                         | 50 Hz                                                                                                                                                    |
| Lamp                                  | LED                                                                                                                                                      |
| Lamp holder                           | Without fitting                                                                                                                                          |
| Protection class                      | I                                                                                                                                                        |
| Degree of protection                  | IP65                                                                                                                                                     |
| Dimmable                              | No                                                                                                                                                       |
| Control                               | on/off                                                                                                                                                   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L70/B50 at 25 °C      | 50,000 h                                                                                                                                                 |
| Energy efficiency class               | not required                                                                                                                                             |

| Mounting technology         |                  |
|-----------------------------|------------------|
| Mounting method             | Surface mounting |
| Place of installation       | Wall-mounted     |
| Adjustability               | Not adjustable   |
| Impact resistance           | IK10             |
| Material cover              | Plastic, opal    |
| Suitable for through-wiring | Yes              |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 1.686 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 285 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging width         | 280 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging height        | 100 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |