




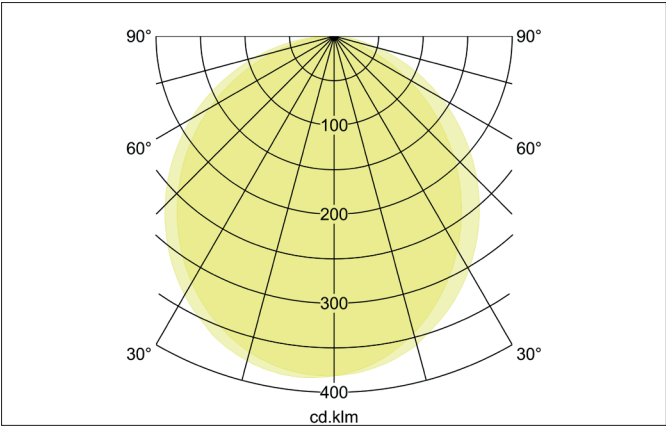

EYE LED surface-mounted wall light, IP65, switchable, seawater-protected
Article no. 10037183MC

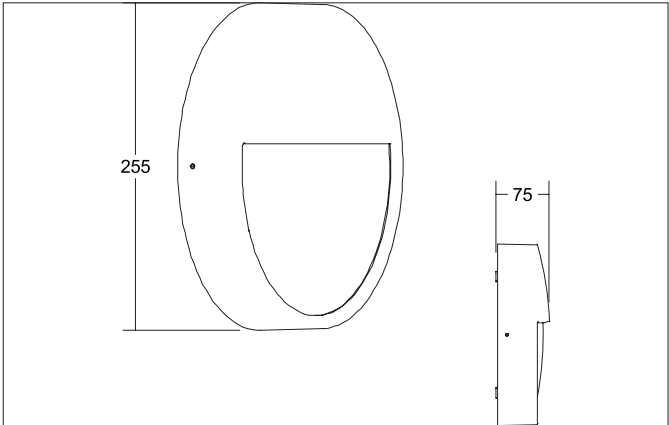

Tender
Surface-mounted LED wall light, IP65, 3CCT, switchable, seawater-protected, luminaire diameter 255 mm, height 75 mm, weight 1.435 kg, with rotationally symmetrical narrow-wide beam light distribution. Opal plastic cover, rated luminous flux 880 lm, rated wattage 1 x 12 W, light color warm white to daylight white, most similar color temperature (CCT) 3,000 - 5,700 K, general color rendering index CRI > 80, service life L70/B50 at 25 °C: 50,000 h, housing material: aluminum / plastic, color: black structure, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): I, degree of protection (DIN EN 60529): IP65, degree of impact resistance according to IEC62262: IK10. For connection to an external control gear, which is not included with the luminaire. switchable.

Article data	
Article no.	10037183MC
GTIN	4251433990857
Series name	EYE
Short description	LED surface-mounted wall light, IP65, switchable, seawater-protected
Material	Aluminium / Plastic
Colour	black structure
Type of surface	Structure
Shape	Round
Outer diameter	255 mm
Height	75 mm
Scope of delivery	inkl. Konverter zum Anschluss an 230 V-Netzspannung, schaltbar
Weight	1.435 kg
Conformance	CE, UKCA


EYE LED surface-mounted wall light, IP65, switchable, seawater-protected

Article no. 10037183MC

Lighting technology	
Colour temperature	3.000 K / 4.000 K / 5.700 K
Light colour	white
Color Temperature 1	3,000 K
Light output	Direct
Luminous flux	880 lm
Luminous flux 1	880 lm
System efficiency	73 lm/W
Colour rendering	CRI > 80
Luminaire optics	Cover satin
Reflector	Without
Beam angle	110°
Light sharing	Symmetric
Adjustable color temperature	Stages

Operating technology of the luminaire	
System output	12 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Frequency min	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP65
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h
Energy efficiency class	not required

Mounting technology	
Mounting method	Surface mounting
Place of installation	Wall-mounted
Adjustability	Not adjustable
Impact resistance	IK10
Material cover	Plastic, opal
Suitable for through-wiring	Yes

Packing data	
Gross weight	1.686 kg
Length of packaging	285 mm
Packaging width	280 mm
Packaging height	100 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.