BRUMBERG
Light. Since 1873.

# LAVILO I MIDI LED Wallwasher, IP66

Article no. 60855642

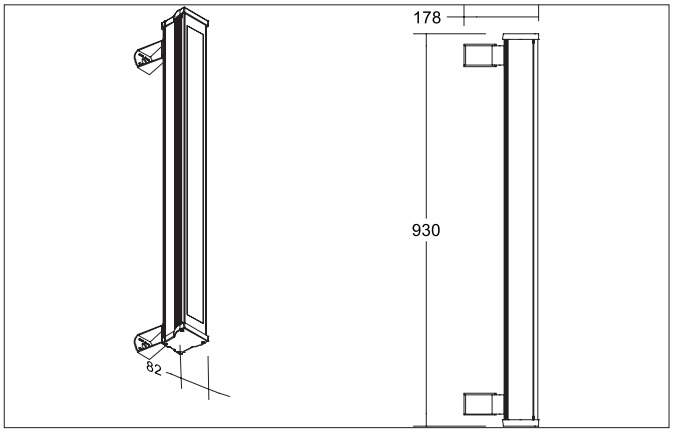


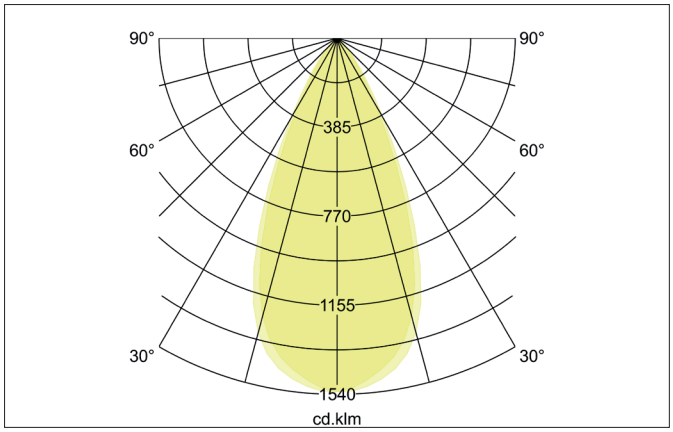







| Tender |
|---|
| LED Wallwasher, IP66, Rectangular.Luminaire length 930.0 mm, Luminaire width 82.0 mm, Hight 86.0 mm Weight 4.0 kg, with rotattions-symmetrical, deep, wide distributed light intensity. Cover glass transparentLuminous flux 3.980 lm, Power 1 x 22 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Aluminium / Glass, Colour: titanium matt, Permissible ambient temperature (ta): -25 °C up to +50 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP66, shock resistance according to IEC62262: IK08 .With electronic driver, DALI-DT6 dimmable. |

| Article data | |
|---|---|
| Article no. | 60855642 |
| GTIN | 4251433994343 |
| Series name | LAVILO I MIDI |
| Short description | LED Wallwasher, IP66 |
| Material | Aluminium / Glass |
| Colour | titanium matt |
| Type of surface | Matt |
| Shape | Rectangular |
| Length | 930 mm |
| Width | 82 mm |
| Hight | 86 mm |
| Scope of delivery | incl. converter for connection to 230 V mains voltage, DALI. |
| Weight | 4 kg |
| D licence plate | No |
| Conformance | CE, UKCA |

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors.
Date 28.05.2026 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

BRUMBERG
Light. Since 1873.

## LAVILO I MIDI LED Wallwasher, IP66

Article no. 60855642

| Lighting technology | |
|---|---|
| Colour temperature | RGBW |
| Light colour | RGBW |
| Light output | Direct |
| Luminous flux | 3,980 lm |
| System efficiency | 121 lm/W |
| McAdam-Step | McAdam-Step 5 |
| Colour rendering | CRI > 80 |
| Luminaire optics | Lens |
| Beam angle | 50° |
| Light sharing | Symmetric |
| Adjustable color temperature | No |

| Operating technology of the luminaire | |
|---|---|
| System output | 33 W |
| Voltage type | AC |
| AC nominal voltage max | 230 V |
| Frequency max | 50 Hz |
| Frequency min | 50 Hz |
| Lamp | LED |
| Lamp holder | Without fitting |
| Protection class | I |
| Degree of protection | IP66 |
| Ambient temperature | -25°C up to +50°C |
| Dimmable | Yes |
| Control | DALI-DT6 |
| Design of the connecting cable | side connection cable |
| Bulb change possible | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L90/B10 at 25 °C | 50.000 h |
| Energy efficiency class | not required |

| Mounting technology | |
|---|---|
| Mounting method | Surface mounting |
| Place of installation | Wall-mounted |
| Adjustability | Pivoted |
| Swivel angle | 180° |
| Impact resistance | IK08 |
| Cover | Glass transparent |
| Suitable for through-wiring | No |

| Packing data | |
|---|---|
| Gross weight | 4.5 kg |
| Length of packaging | 980 mm |
| Packaging width | 140 mm |
| Packaging hight | 140 mm |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.<br>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors.
Date 28.05.2026 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/