



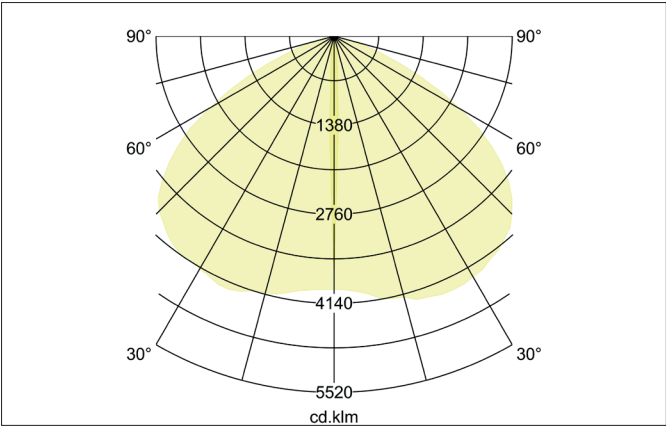

**NIAS LED surface-mounted floor light, IP65, switchable**  
Article no. 60122103

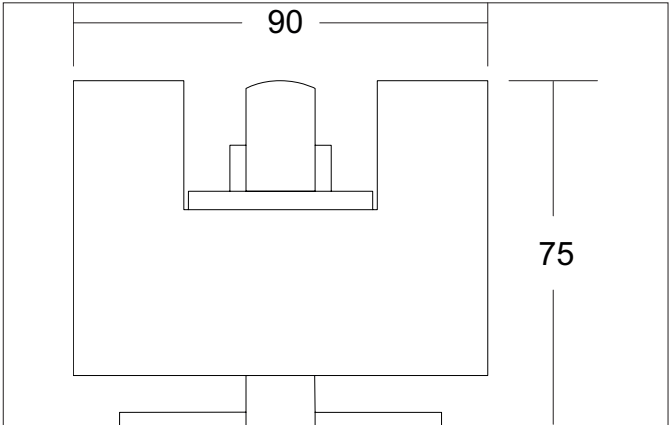

**Tender**  
LED surface-mounted floor light, IP65, switchable, Other., Hight 75.0 mm Weight 0.742 kg, with rotattionssymmetrical, deep, wide distribu-  
ted light intensity. Cover plastic, opalLuminous flux 288 lm, Power 1 x 3 W, Light colour warm white, Correlated color temprature (CCT)  
3.000 K, Colour rendering index CRI > 80, Housing material: Aluminium, Colour: graphite structure, Permissible ambient temperature (ta):  
-40 °C up to +45 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP66, shock resistance according to IEC62262:  
IK07 .With electronic driver, on/off switchable.

| Lighting technology          |           |
|------------------------------|-----------|
| Colour temperature           | 3.000 K   |
| Light colour                 | white     |
| Light output                 | Direct    |
| Luminous flux                | 288 lm    |
| System efficiency            | 96 lm/W   |
| Colour rendering             | CRI > 80  |
| Reflector                    | Without   |
| Beam angle                   | 3°        |
| Beam angle                   | 165°      |
| Light sharing                | Symmetric |
| Adjustable color temperature | No        |


**NIAS LED surface-mounted floor light, IP65, switchable**

Article no. 60122103

| Operating technology of the luminaire |                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| System output                         | 3 W                                                                                                                                                      |
| Voltage type                          | AC                                                                                                                                                       |
| AC nominal voltage max                | 230 V                                                                                                                                                    |
| Frequency max                         | 50 Hz                                                                                                                                                    |
| Frequency min                         | 50 Hz                                                                                                                                                    |
| Lamp                                  | LED                                                                                                                                                      |
| Lamp holder                           | Without fitting                                                                                                                                          |
| Protection class                      | I                                                                                                                                                        |
| Degree of protection                  | IP66                                                                                                                                                     |
| Ambient temperature                   | -40°C up to +45°C                                                                                                                                        |
| Dimmable                              | No                                                                                                                                                       |
| Control                               | on/off                                                                                                                                                   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Energy efficiency class               | not required                                                                                                                                             |

| Mounting technology         |                  |
|-----------------------------|------------------|
| Mounting method             | Surface mounting |
| Place of installation       | Floor-mounted    |
| Adjustability               | Not adjustable   |
| Impact resistance           | IK07             |
| Further references          | Outdoor          |
| Cover                       | Plastic, opal    |
| Suitable for through-wiring | No               |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.742 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 100 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging width         | 100 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging height        | 85 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |