




QUALITYFLEX Protection Horizon Segment LED flex board 125 mm, CRI >80, 15 W / m, IP67
Article no. 76602002

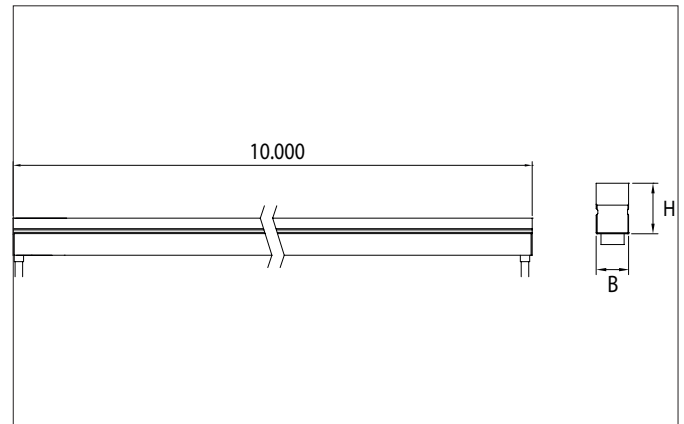

Tender

Segment LED flex board 125 mm, CRI >80, 15 W / m, IP67, white, Light colour: RGBW, 2.700K, CRI > 80. Length: 10000 mm . Lamp power per meter: 15.0 W/m, Degree of protection: IP67, Protection class: III, Voltage: 24V DC, Beam angle: 120.0 °, 96 LEDs per meter, Chip distance (Short Pitch) : 10,42mm. For individual application, the LED flex board can be used all 125 mm be cut back. If the LED flex board is shortened, the IP protection must be restored by the customer. The maximum system length of 10.000 mm must not be exceeded with one feed-in.

Product Benefits

- Suitable for indoor and outdoor applications (IP67).
- Can be divided every 125 mm (protection class IP65).
- Ideal for terraces, facades and entrance areas.
- Light colors: red / green / blue / white (color temperature: 2700 K, CRI > 80)
- Service life L80/B10: 36,000 hours.
- Simple installation with matching aluminum profiles or mounting clips.
- Dimmable with appropriate accessories.



QUALITYFLEX Protection Horizon Segment LED flex board 125 mm, CRI >80, 15 W / m, IP67
Article no. 76602002

Article data	
Article no.	76602002
GTIN	425 143397 1337
Series name	QUALITYFLEX Protection Horizon
Short description	Segment LED flex board 125 mm, CRI >80, 15 W / m, IP67
Colour	white
Length	10,000 mm
Width	12 mm
Hight	20 mm
Scope of delivery	incl. 1 x assembly instructions, 5 x identification labels
Weight	0.028 kg
Length of the connection line	1,000 mm
Conformance	CE, UKCA

Lighting technology	
Colour temperature	RGBW
Light colour	RGBW
Luminous flux	122 lm
Luminous flux red	36 lm/m
Luminous flux green	107 lm/m
Luminous flux blue	34 lm/m
System efficiency	8 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Beam angle	120°
Adjustable color temperature	No

Operating technology of the luminaire	
Lamp power per meter	15 W/m
Voltage type	DC
DC nominal voltage max	24 V
Lamp	LED
Protection class	III
Degree of protection	IP67
Ambient temperature	-20°C up to +40°C
Dimmable	Yes
Wire number	5
Control	Depending on driver
Length of the connection line	1,000 mm
Cable assignment	black (+) white (-) blue (-) green (-) red (-)
Design of the connecting cable	one-sided
Bulb change possible	No
Rated life time L70/B50 at 25 °C	54,000 h
Rated life time L80/B10 at 25 °C	36.000 h
Energy efficiency class	F



QUALITYFLEX Protection Horizon Segment LED flex board 125 mm, CRI >80, 15 W / m, IP67
 Article no. 76602002

Operating technology of QualityFlex	
Power per meter	15 W/m
Short Pitch	10.42 mm
Number of lamps per meter	96 Qty
Length of individual sections	125 mm
Smallest bend radius	120 mm
Length	10,000 mm
Maximum module length	10,000 mm
Circuit type	Parallel conduction
LED Type	5050 LED

Packing data	
Gross weight	0.032 kg
Length of packaging	490 mm
Packaging width	440 mm
Packaging height	40 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

Compatible Driver						
Article no.						
17206000						
17207000						
17214000						
17223000						
17224000						
17225000						
17226000						
17227000						
17228000						
17240000	1 W	20 W	on/off	150 mm	40 mm	30 mm
17241000	1 W	40 W	on/off	210 mm	40 mm	30 mm
17242000	1 W	60 W	on/off	250 mm	40 mm	30 mm
17243000	1 W	120 W	on/off	300 mm	40 mm	30 mm
17244000	1 W	150 W	on/off	310 mm	40 mm	30 mm
17260000						

Compatible Controller						
Article no.		Power	Control	Length	Width	Height
18151000	1 W	240 W	KNX	170 mm	59 mm	30 mm
18152000	1 W	240 W	DALI-DT6	170 mm	59 mm	30 mm
18153000	1 W	240 W	DMX	170 mm	59 mm	30 mm
18154000	1 W	240 W	1-10 V	170 mm	59 mm	30 mm
18155000	1 W	240 W	DALI-2	170 mm	59 mm	30 mm
18161000	1 W	240 W	KNX	72 mm	90 mm	70 mm
18162000	1 W	240 W	DALI-DT6	54 mm	110 mm	66 mm
18164000	1 W	240 W	1-10 V	54 mm	110 mm	66 mm
18165000	1 W	240 W	DALI-2	54 mm	110 mm	66 mm
18223000	1 W	240 W	Wireless technology control	145 mm	47 mm	16 mm
18157000	1 W	240 W	ZigBee	145 mm	46.5 mm	16 mm
18192000	1 W	240 W	Wireless technology control	160 mm	45 mm	18 mm
17290000	1 W	100 W	DALI-2	244 mm	64 mm	32 mm
17291000	1 W	200 W	DALI-2	330 mm	79 mm	39 mm



QUALITYFLEX Protection Horizon Segment LED flex board 125 mm, CRI >80, 15 W / m, IP67
Article no. 76602002

Compatible Profiles				
Short description	Series name	Length	Width	Hight
Mounting profile 53581260	QUALITYFLEX Protection Ho- rizon	1,000 mm	17.5 mm	22.9 mm
Bendable add-on profile, 500 mm 53582260	QUALITYFLEX Protection Ho- rizon	5 14 mm	13.5 mm	18 mm