




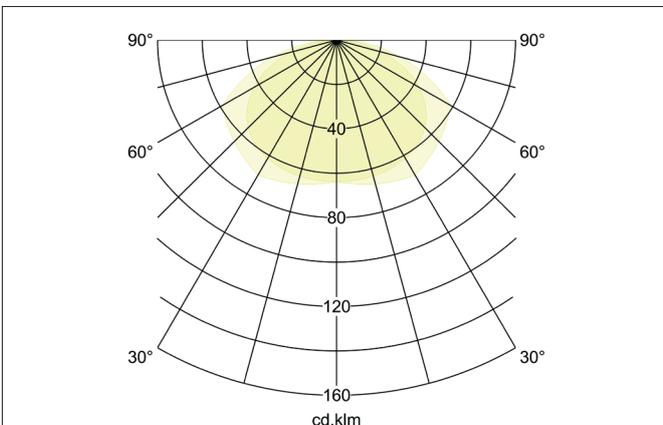

ADARA LED pendant light, 1195x195, transparent
 Article no. 49230073DA

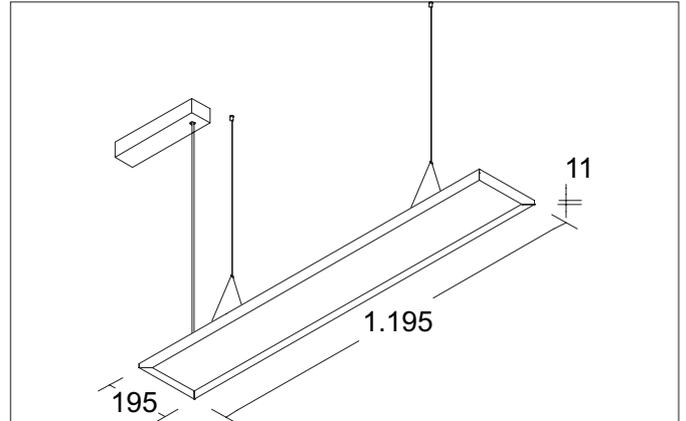

Tender
 LED pendant light, 1195x195, transparent, Square. Luminaire length 1195.0 mm, Luminaire width 195.0 mm, Height 12.5 mm, for pendulum mounting. Pendulum length max. 1500.0 mm Weight 3.3 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover plastic, transparent Luminous flux 4.690 - 4.860 lm, UGR < 19, Power 1 x 39 W, Light colour warm white to neutral white, Correlated color temperature (CCT) 3.000 - 4.000 K, Colour rendering index CRI > 80, Rated life time L70/B10 at 25 °C: 110.000 h, Rated life time L70/B50 at 25 °C: 125.000 h, Rated life time L80/B10 at 25 °C: 78.000 h, Rated life time L80/B50 at 25 °C: 100.000 h, Housing material: Aluminium / PMMA, Colour: white matt, Permissible ambient temperature (ta): -20 °C up to +45 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20, shock resistance according to IEC62262: IK03 .With electronic driver, DALI-2 dimmable.

Article data	
Article no.	49230073DA
GTIN	4255752525790
Series name	ADARA
Short description	LED pendant light, 1195x195, transparent
Material	Aluminium / PMMA
Colour	white matt
Shape	Square
Length	1,195 mm
Width	195 mm
Height	12.5 mm
Weight	3.3 kg
D licence plate	No
Conformance	CE, UKCA


ADARA LED pendant light, 1195x195, transparent

Article no. 49230073DA

Lighting technology	
Colour temperature	3.000 K / 4.000 K
Light colour	white
Color Temperature 1	3,000 K
Color Temperature 2	4,000 K
Light output	Direct/Indirect
Luminous flux	4,690 - 4,860 lm
Luminous flux 1	4,690 lm
Luminous flux 2	4,860 lm
Luminous flux in emergency lighting mode	390 lm
System efficiency	125 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Reflector	Without
Beam angle	85°
Glare evaluation	UGR < 19
Light sharing	Symmetric
Photobio. Risk group according to EN 62778	RG0
Photobio. Risk group according to EN 62471	RG0
Adjustable color temperature	Stages

Operating technology of the luminaire	
System output	39 W
Voltage type	AC/DC
AC nominal voltage min	198 V
AC nominal voltage max	264 V
DC nominal voltage min	198 V
DC nominal voltage max	264 V
Frequency max	60 Hz
Frequency min	50 Hz
Lamp	LED exchangeable
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP20
Ambient temperature	-20°C up to +45°C
Dimmable	Yes
Control	DALI-2 , DALI-DT6
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Glow wire test according to IEC 60695-2-12	650°C
Rated life time L70/B50 at 25 °C	125.000 h
Rated life time L80/B10 at 25 °C	78.000 h
Rated life time L80/B50 at 25 °C	100.000 h
Rated life time L90/B10 at 25 °C	30.000 h
Energy efficiency class	not required
max. no. lights on B16 A	73
max. no. lights on C10 A	46
max. no. lights on C16 A	73

Mounting technology	
Mounting method	Suspended
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Impact resistance	IK03
Pendulum length max.	1,500 mm
Cover	Plastic, transparent
Suitable for through-wiring	Yes

**ADARA LED pendant light, 1195x195, transparent**
Article no. 49230073DA

Packing data	
Gross weight	3.9 kg
Length of packaging	1,245 mm
Packaging width	240 mm
Packaging height	40 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>