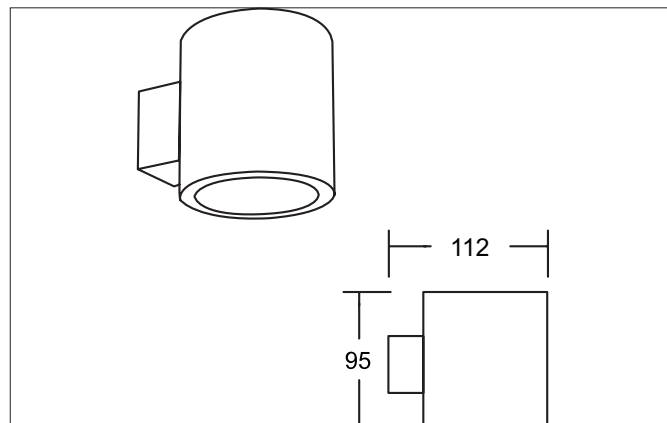



**M1 Wall surface mounted housing, round, flush, recessed with module bracket, pivoted, without LED module**

Article no. 45208170


**Tender**

Wall surface mounted housing, round, flush, recessed with module bracket, pivoted, without LED module, Round. Luminaire diameter 90.0 mm, Height 95.0 mm Weight 0.288 kg, with rotationssymmetrical, deep, wide distributed light intensity. with Lamp holder Without fitting max: 8 W , Delivery without bulb. Housing material: Aluminium, Colour: white structure, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): III, Degree of protection (DIN EN 60529): IP20. For connection to an external driver, which is not included in the scope of delivery of the luminaire. Depending on driver dimmable.

**Product Benefits**

- Part of the modular M1 system for recessed and surface-mounted ceilings and wall mounting.
- Empty housing for accommodating Brumberg LED modules up to an output of max. 8 W.
- Available in single color textured white, textured black or in combination textured white / textured black or textured black / textured white.
- Over 200 other housing versions plus approx. 30 different LED modules for these housing versions for all common control types.

Note: When fitted with 24 V LED modules, the power supply unit and control unit must always be installed outside the housing for space reasons.


**M1 Wall surface mounted housing, round, flush, recessed with module bracket, pivoted, without LED module**

Article no. 45208170

| Article data      |   |
|-------------------|---|
| Article no.       | 45208170  |
| GTIN              | 4255752502050   |
| Series name       | M1  |
| Short description | Wall surface mounted housing, round, flush, recessed with module bracket, pivoted, without LED module |
| Material          | Aluminium   |
| Colour            | white structure   |
| Type of surface   | Structure   |
| Shape             | Round   |
| Outer diameter    | 90 mm   |
| Hight             | 95 mm   |
| Scope of delivery | incl. recessed module holder, swivel-mounted  |
| Weight            | 0.288 kg  |
| D licence plate   | No  |
| Conformance       | CE, UKCA  |

| Operating technology of the luminaire |                                   |
|---------------------------------------|-----------------------------------|
| Lamp                                  | For LED                           |
| Lamp holder                           | Without fitting                   |
| Protection class                      | III                               |
| Degree of protection                  | IP20                              |
| Dimmable                              | Depending on type of control gear |
| Control                               | Depending on driver               |
| Energy efficiency class               | not required                      |

| Mounting technology   |                  |
|-----------------------|------------------|
| Mounting method       | Surface mounting |
| Place of installation | Wall-mounted     |
| Adjustability         | Pivoted          |
| Swivel angle          | 20°              |
| Material cover        | Without cover    |
| Circlip               | Without circlip  |

| Packing data            |   |
|-------------------------|---|
| Gross weight            | 0.333 kg  |
| Length of packaging     | 100 mm  |
| Packaging width         | 100 mm  |
| Packaging hight         | 135 mm  |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.<br>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |


**M1 Wall surface mounted housing, round, flush, recessed with module bracket, pivoted, without LED module**

Article no. 45208170

| Compatible LED-modu- |       |            |   |                  |  |         |                 |
|----------------------|-------|------------|---|------------------|--|---------|-----------------|
| Article no.          | Power | Beam angle | Colour temperature  | Colour rendering |  | Input   | Hight LED-Modul |
| 12925003             | 3 W   | 38°        | 2.700 K   | CRI > 80         |  | 350 mA  | 40 mm           |
| 12926003             | 3 W   | 38°        | 3.000 K   | CRI > 80         |  | 350 mA  | 40 mm           |
| 12925004             | 3 W   | 38°        | 4.000 K   | CRI > 80         |  | 350 mA  | 40 mm           |
| 12923383             | 6 W   | 38°        | 2.700 K   | CRI > 80         |  | 350 mA  | 32 mm           |
| 12923603             | 6 W   | 60°        | 2.700 K   | CRI > 80         |  | 350 mA  | 32 mm           |
| 12927383             | 6 W   | 38°        | 2.700 K   | CRI > 90         |  | 350 mA  | 32 mm           |
| 12924383             | 6 W   | 38°        | 3.000 K   | CRI > 80         |  | 350 mA  | 32 mm           |
| 12924603             | 6 W   | 60°        | 3.000 K   | CRI > 80         |  | 350 mA  | 32 mm           |
| 12928383             | 6 W   | 38°        | 3.000 K   | CRI > 90         |  | 350 mA  | 32 mm           |
| 12924384             | 6 W   | 38°        | 3.500 K   | CRI > 80         |  | 350 mA  | 32 mm           |
| 12924604             | 6 W   | 60°        | 3.500 K   | CRI > 80         |  | 350 mA  | 32 mm           |
| 12928384             | 6 W   | 38°        | 3.500 K   | CRI > 90         |  | 350 mA  | 32 mm           |
| 12923384             | 6 W   | 38°        | 4.000 K   | CRI > 80         |  | 350 mA  | 32 mm           |
| 12923604             | 6 W   | 60°        | 4.000 K   | CRI > 80         |  | 350 mA  | 32 mm           |
| 12927384             | 6 W   | 38°        | 4.000 K   | CRI > 90         |  | 350 mA  | 32 mm           |
| 12920183             | 6 W   | 18°        | 3.000 K   | CRI > 80         |  | 350 mA  | 31 mm           |
| 12920243             | 6 W   | 24°        | 3.000 K   | CRI > 80         |  | 350 mA  | 31 mm           |
| 12920003             | 6 W   | 38°        | 3.000 K   | CRI > 80         |  | 350 mA  | 31 mm           |
| 12920603             | 6 W   | 60°        | 3.000 K   | CRI > 80         |  | 350 mA  | 31 mm           |
| 12920184             | 6 W   | 18°        | 4.000 K   | CRI > 80         |  | 350 mA  | 31 mm           |
| 12920244             | 6 W   | 24°        | 4.000 K   | CRI > 80         |  | 350 mA  | 31 mm           |
| 12920004             | 6 W   | 38°        | 4.000 K   | CRI > 80         |  | 350 mA  | 31 mm           |
| 12920604             | 6 W   | 60°        | 4.000 K   | CRI > 80         |  | 350 mA  | 31 mm           |
| 12963383             | 6 W   | 38°        | 3.000 K - 1.800 K   | CRI > 90         |  | 350 mA  | 32 mm           |
| 12963603             | 6 W   | 60°        | 3.000 K - 1.800 K   | CRI > 90         |  | 350 mA  | 32 mm           |
| 12823003             | 8 W   | 60°        | 2.850 K   | CRI > 90         |  | 24.00 V | 50 mm           |
| 12845604             | 8 W   | 60°        | 2.700 K - 6.500 K   | CRI > 90         |  | 24.00 V | 52 mm           |
| 18438002             | 8 W   | 60°        | RGB+WW  | CRI > 90         |  | 24.00 V | 50 mm           |
| 12929503             | 6.3 W | 50°        | 2.700 K / 3.000 K / 4.000 K                                 | CRI > 80         |  | 350 mA  | 34 mm           |
| 12930503             | 5.9 W | 50°        | 2.700 K / 3.000 K / 4.000 K                                 | CRI > 90         |  | 350 mA  | 34 mm           |
| 12933553             | 6 W   | 55°        | 2.700 K / 3.000 K / 4.000 K + dim-2warm (3.000 K - 2.200 K) | CRI > 90         |  | 350 mA  | 32 mm           |

**M1 Wall surface mounted housing, round, flush, recessed with module bracket, pivoted, without LED module**

Article no. 45208170

**Required accessories**

Article no.: 17665000

LED converter 350 mA, switchable

Power: 1 - 3,2 W, Plug&amp;Play

Dimensions: 52 mm x 30 mm x 23 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17665000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17665000_2021_DE.pdf)

Article no.: 17662000

LED converter 350 mA, on/off switchable

Power: 1 - 7,2 W, Plug&amp;Play

Dimensions: 68 mm x 35 mm x 21 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17662000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17662000_2021_DE.pdf)

Article no.: 17652000

LED-round converter 350 mA, trailing-edge phase dimmer

Power: 4,9 - 7 W, Plug&amp;Play

Dimensions: 51 mm x 24 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17652000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf)

Article no.: 17658000

LED round converter 350 mA, DALI dimmable (digital)

Power: 2,1 - 9 W, Plug&amp;Play

Dimensions: 56 mm x 25 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17658000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17658000_2021_DE.pdf)