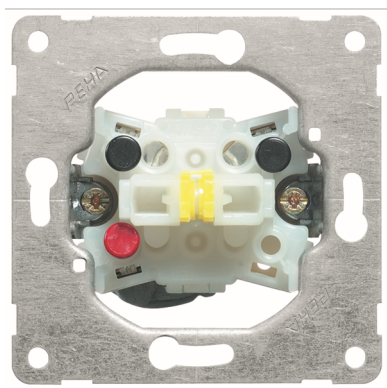


**Rocker switch, series bridged
without spreading****Product Data Sheet**

Number of rockers	2
Switching current for fluorescent lamps	6Fluorescent lamp rated current
Nominal voltage	250Volt
Method of operation	Rocker/button
Mounting method	Flush mounted (plaster)
Material	Other
Surface protection	Untreated
Colour	Other
Suitable for degree of protection (IP)	IP20

**Rocker switch, series bridged
without spreading**

Rocker switch without spreading for screw fastening
for all flush-mounted programmes 10 A 250 V~
Series bridged switch 1)
1) in compliance with workplace regulations,
can be illuminated with the aid of glow/
filament lamp elements.

Material No.	Article No.	EAN-code
00190521	H 515	4010105190526

PEHA Elektro GmbH & Co.KG

a Honeywell Company
Daimlerstraße 4
58553 HALVER
DEUTSCHLAND

Tel.: 02353 9118 001
Fax: 02353 9118 311
mail: peha@honeywell.com
www.peha.de

Änderungen vorbehalten. © Honeywell PEHA