





PEPA Flat recessed 48 V Track, length: 3,000 mm
Article no. 88477380

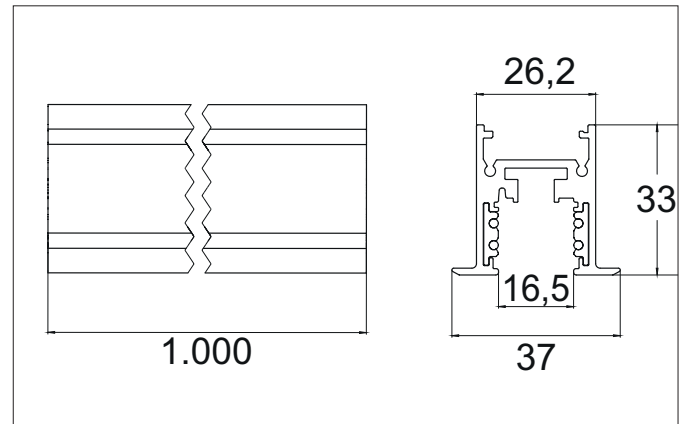


Tender

Flat recessed 48 V Track, length: 3,000 mm, black, Rectangular. In a compact design, for installation in tool-less rapid assembly systems. Mounting method: Recessed mounting, Place of installation: Ceiling-/Wall-mounted, Material: Aluminium, Degree of protection: (DIN EN 60529) IP20, Protection class: (DIN EN 61140) III, Voltage: 48 V DC, .


PEPA Flat recessed 48 V Track, length: 3,000 mm

Article no. 88477380

Leistung	maximale Schienenlänge in Metern
100 Watt	50 m
250 Watt	35 m
Angabe beziehen sich auf eine Last, die der gelieferten Leistung entspricht und gleichmäßig auf die entsprechende Länge in der Tabelle verteilt ist.	

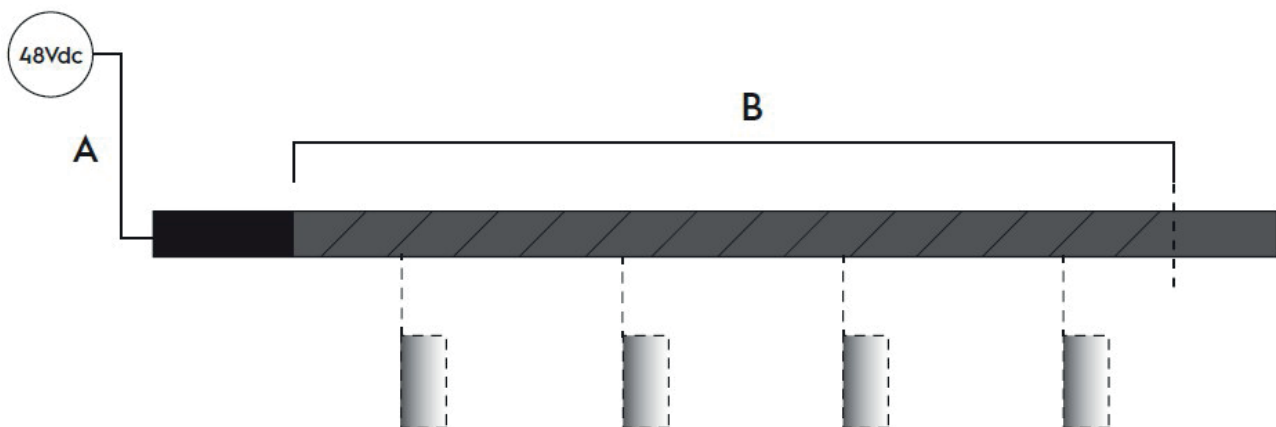

Article data	
Article no.	88477380
GTIN	4255752535201
Series name	PEPA
Short description	Flat recessed 48 V Track, length: 3,000 mm
Material	Aluminium
Colour	black
RAL colour	9005
Type of surface	Structure
Shape	Rectangular
Length	3,000 mm
Width	37 mm
Built-in length	3000 mm
Built-in width	26.2 mm
Height	33 mm
Weight	2.658 kg
stamp	ENEC
Conformance	CE, UKCA

Operating technology of the luminaire	
Voltage type	DC
DC nominal voltage min	48 V
DC nominal voltage max	48 V
Protection class	III
Degree of protection	IP20
Wire number	4


PEPA Flat recessed 48 V Track, length: 3,000 mm

Article no. 88477380

Operating technology of driver	
DC nominal voltage min	48 V
DC nominal voltage max	48 V
Protection class	III
Degree of protection	IP20
Nominal cross-section	2.00 mm ²

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-/Wall-mounted

Packing data	
Gross weight	2.68 kg
Length of packaging	3,003 mm
Packaging width	54 mm
Packaging height	27 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

Optional accessories	
Article no.: 88479080 End cap for flat 48 V recessed track DALI / without cable outlet	
Dimensions: 10 mm x 37 mm x 27 mm https://www.brumberg.com/fileadmin/products/Datenblatt_88479080_2021_DE.pdf	
Article no.: 88484080 L-connector 90° to 48 V track	
Dimensions: 105 mm x 16.3 mm x 18.2 mm https://www.brumberg.com/fileadmin/products/Datenblatt_88484080_2021_DE.pdf	
Article no.: 88484180 Flexible connector for 48 V track	
Dimensions: 273.5 mm x 16.3 mm x 18.2 mm https://www.brumberg.com/fileadmin/products/Datenblatt_88484180_2021_DE.pdf	
Article no.: 88484280 Final power supply to 48 V track	
Dimensions: 111.7 mm x 16.3 mm x 18.2 mm https://www.brumberg.com/fileadmin/products/Datenblatt_88484280_2021_DE.pdf	
Article no.: 88484380 Electrical connector for 48 V track	
Dimensions: 105 mm x 16.3 mm x 18.2 mm https://www.brumberg.com/fileadmin/products/Datenblatt_88484380_2021_DE.pdf	