
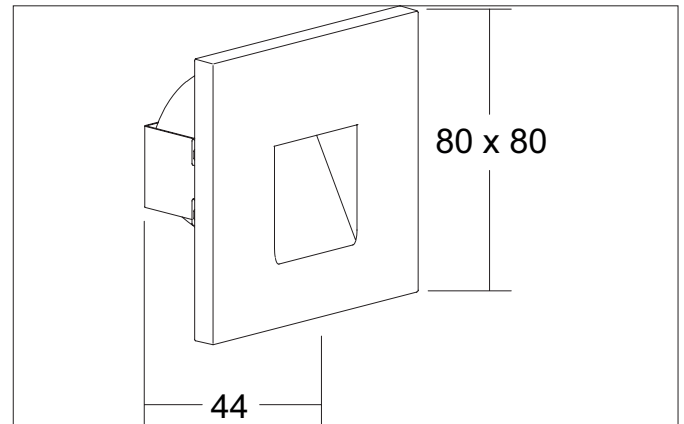



BELITUNG LED recessed wall light, IP65, on/off switchable

Article no. 65173173


Tender

LED recessed wall light, IP65, on/off switchable, Square. Ceiling cut-out Ø 68 mm, Installation depth 44 mm, Length 80 mm, Width 80 mm, Weight 0,105 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover plastic, transparent Luminous flux 85 lm, Power 1 x 1,5 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 50.000 h, Housing material: Aluminium / Polycarbonate, Colour: white matt, Permissible ambient temperature (ta): -20 °C up to +45 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP65, shock resistance according to IEC62262: IK04 .With electronic driver, on/off switchable.


BELITUNG LED recessed wall light, IP65, on/off switchable

Article no. 65173173

Article data	
Article no.	65173173
GTIN	4255752529224
Series name	BELITUNG
Short description	LED recessed wall light, IP65, on/off switchable
Material	Aluminium / Polycarbonate
Colour	white matt
Type of surface	Matt
Shape	Square
Length	80 mm
Width	80 mm
Built-in diameter	68 mm
Installation depth	44 mm
Hight	4 mm
Scope of delivery	inkl. Konverter zum Anschluss an 230 V-Netzspannung
Weight	0.105 kg
D licence plate	No
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K
Light colour	white
Light output	Direct
Luminous flux	85 lm
System efficiency	57 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Reflector	Without
Beam angle	20°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	1.5 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	60 Hz
Frequency min	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	II
Degree of protection	IP65
Ambient temperature	-20°C up to +45°C
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h
Energy efficiency class	not required
max. no. lights on B16 A	16
max. no. lights on C10 A	22
max. no. lights on C16 A	31


BELITUNG LED recessed wall light, IP65, on/off switchable
 Article no. 65173173

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Wall-mounted
Adjustability	Not adjustable
Impact resistance	IK04
Further references	Outdoor
Cover	Plastic, transparent
Suitable for through-wiring	No

Packing data	
Gross weight	0.15 kg
Length of packaging	97 mm
Packaging width	67 mm
Packaging height	96 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.