



**MASBATE Wall surface-mounted luminaire, IP65, 3CCT, on/off switchable**  
Article no. 65124183

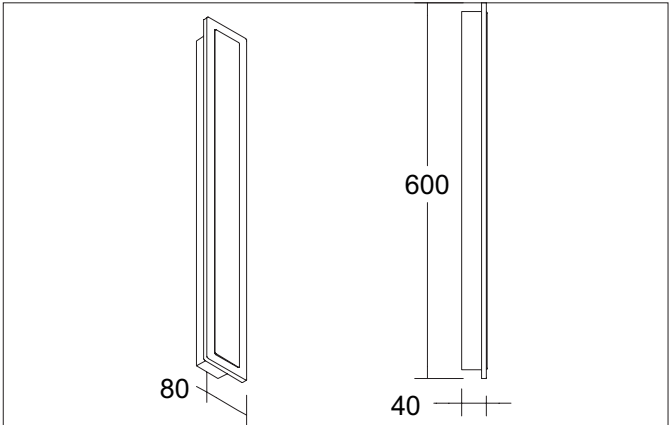

**BRUMBERG**  
Light. Since 1873.

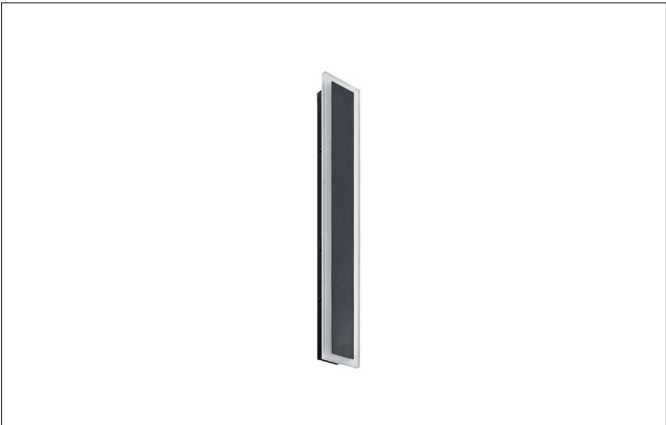

**Tender**  
Wall surface-mounted luminaire, IP65, 3CCT, on/off switchable, Rectangular. Luminaire length 600.0 mm, Luminaire width 80.0 mm, Hight 40.0 mm Weight 1.15 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover PMMALuminous flux 380 lm, Power 1 x 18 W, Light colour warm white to daylight white, Correlated color temprature (CCT) 3.000 - 6.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 50.000 h, Housing material: Stainless steel, Colour: black matt, Permissible ambient temperature (ta): -20 °C up to +45 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP65. With electronic driver, on/off switchable.

| Article data      |                                                               |
|-------------------|---------------------------------------------------------------|
| Article no.       | 65124183                                                      |
| GTIN              | 4255752528838                                                 |
| Series name       | MASBATE                                                       |
| Short description | Wall surface-mounted luminaire, IP65, 3CCT, on/off switchable |
| Material          | Stainless steel                                               |
| Colour            | black matt                                                    |
| Type of surface   | Matt                                                          |
| Shape             | Rectangular                                                   |
| Length            | 600 mm                                                        |
| Width             | 80 mm                                                         |
| Hight             | 40 mm                                                         |
| Scope of delivery | inkl. Konverter zum Anschluss an 230 V-Netzspannung           |
| Weight            | 1.15 kg                                                       |
| D licence plate   | No                                                            |
| Conformance       | CE, UKCA                                                      |


**MASBATE Wall surface-mounted luminaire, IP65, 3CCT, on/off switchable**

Article no. 65124183

| Lighting technology          |                             |
|------------------------------|-----------------------------|
| Colour temperature           | 3.000 K / 4.000 K / 6.000 K |
| Light colour                 | white                       |
| Color Temperature 1          | 3,000 K                     |
| Color Temperature 2          | 4,000 K                     |
| Color Temperature 3          | 6,000 K                     |
| Light output                 | Direct                      |
| Luminous flux                | 380 lm                      |
| Luminous flux 1              | 360 lm                      |
| Luminous flux 2              | 380 lm                      |
| Luminous flux 3              | 370 lm                      |
| System efficiency            | 21 lm/W                     |
| Colour rendering             | CRI > 80                    |
| Luminaire optics             | Cover satin                 |
| Reflector                    | Without                     |
| Beam angle                   | 110°                        |
| Light sharing                | Symmetric                   |
| Adjustable color temperature | Stages                      |

| Operating technology of the luminaire |                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| System output                         | 18 W                                                                                                                                                     |
| Voltage type                          | AC                                                                                                                                                       |
| AC nominal voltage max                | 230 V                                                                                                                                                    |
| Frequency max                         | 60 Hz                                                                                                                                                    |
| Frequency min                         | 50 Hz                                                                                                                                                    |
| Lamp                                  | LED                                                                                                                                                      |
| Lamp holder                           | Without fitting                                                                                                                                          |
| Protection class                      | II                                                                                                                                                       |
| Degree of protection                  | IP65                                                                                                                                                     |
| Ambient temperature                   | -20°C up to +45°C                                                                                                                                        |
| Dimmable                              | No                                                                                                                                                       |
| Control                               | on/off                                                                                                                                                   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L70/B50 at 25 °C      | 50,000 h                                                                                                                                                 |
| Energy efficiency class               | not required                                                                                                                                             |
| max. no. lights on B16 A              | 16                                                                                                                                                       |
| max. no. lights on C10 A              | 22                                                                                                                                                       |
| max. no. lights on C16 A              | 31                                                                                                                                                       |

| Mounting technology         |                  |
|-----------------------------|------------------|
| Mounting method             | Surface mounting |
| Place of installation       | Wall-mounted     |
| Adjustability               | Not adjustable   |
| Mounting type               | screw fastening  |
| Further references          | Outdoor          |
| Cover                       | PMMA             |
| Suitable for through-wiring | No               |

**MASBATE Wall surface-mounted luminaire, IP65, 3CCT, on/off switchable**  
Article no. 65124183



| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 1.35 kg                                                                                                                                                                                                                                                                                                                                                                        |
| Length of packaging     | 85 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging width         | 120 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging hight         | 645 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |