





ELLEF Wall surface-mounted luminaire, IP44, on/off switchable
Article no. 65136623

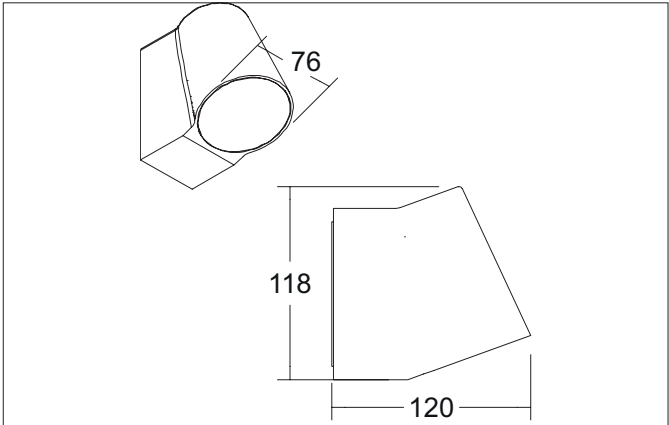

Tender	
Wall surface-mounted luminaire, IP44, on/off switchable, Other.Luminaire length 120.0 mm, Luminaire width 76.0 mm, Hight 118.0 mm Weight 0.4 kg, with rotattionssymmetrical, deep, wide distributed light intensity. Cover glass transparentLuminous flux 370 lm, Power 1 x 6 W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 50.000 h, Housing material: Aluminium / Glass, Colour: aluminum matt brushed, Permissible ambient temperature (ta): -20 °C up to +45 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP44, shock resistance according to IEC62262: IK04 .With electronic driver, on/off switchable.	

Article data	
Article no.	65136623
GTIN	4255752528944
Series name	ELLEF
Short description	Wall surface-mounted luminaire, IP44, on/off switchable
Material	Aluminium / Glass
Colour	aluminum matt brushed
Type of surface	Matt
Shape	Other
Length	120 mm
Width	76 mm
Hight	118 mm
Scope of delivery	inkl. Konverter zum Anschluss an 230 V-Netzspannung
Weight	0.4 kg
D licence plate	No
Conformance	CE, UKCA


ELLEF Wall surface-mounted luminaire, IP44, on/off switchable

Article no. 65136623

Lighting technology	
Colour temperature	3.000 K
Light colour	white
Light output	Direct
Luminous flux	370 lm
System efficiency	62 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Luminaire optics	Without
Reflector	Other
Beam angle	60°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	6 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	60 Hz
Frequency min	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP44
Ambient temperature	-20°C up to +45°C
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h
Energy efficiency class	not required

Mounting technology	
Mounting method	Surface mounting
Place of installation	Wall-mounted
Adjustability	Not adjustable
Impact resistance	IK04
Mounting type	screw fastening
Further references	Outdoor
Cover	Glass transparent
Suitable for through-wiring	No

Packing data	
Gross weight	0.5 kg
Length of packaging	155 mm
Packaging width	110 mm
Packaging height	155 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.