




Modular-Stecker MP6(6) AWG26-24



| Bestell-Nr. Order Nr. | Bezeichnung Description | Barcode EAN 13 | VPE PU |
|--------------------------|---------------------------------|-------------------|-----------|
| J00026A0183 | Modular-Stecker MP6(6) AWG26-24 | 4018359363369 | 100 |


| Bestell-Nr. Order Nr. | Verpackung Packing | VPE PU | Karton Carton | UPE OPU | Karton Carton | UPE OPU | Karton Outer carton |
|--------------------------|---|--------------------|------------------|------------|------------------|------------|------------------------|
| J00026A0183 | 100 pcs. in PE bag, one mounting information | 100 pcs. in carton | - | - | - | - | - |

Montageanleitung siehe: www.telegaertner.com
Mounting instructions see: www.telegaertner.com

Modular-Stecker MP6(6) AWG26-24

Optional

| Bestell-Nr. Order Nr. | Bezeichnung Description | Barcode EAN 13 | VPE PU |
|--------------------------|----------------------------|-------------------|-----------|
| N00001A0006 | Crimp tool | 4018359251024 | 1 pc. |

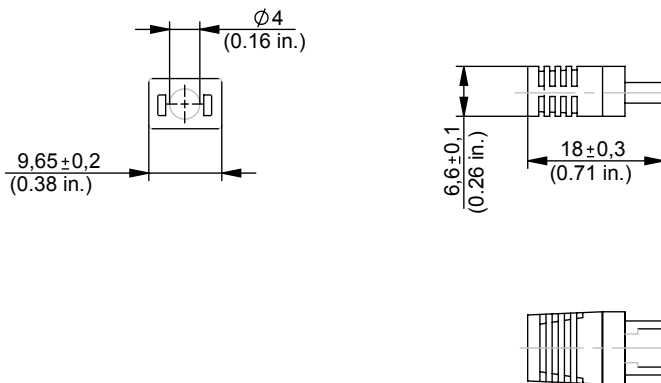

Knickschutzhüllen müssen separat bestellt werden. Max Kabeldurchmesser : 4,0 mm.
Bend protections need to be ordered separately. Max. cable diameter : 4,0 mm.

| Bestell-Nr. Order Nr. | Bezeichnung Description | Barcode EAN 13 | Farbe Colour | RAL | VPE PU |
|--------------------------|--|-------------------|-----------------|----------|--------------------|
| B00080A0098 | Cable boot for MP6(6) $\varnothing 4,0$ mm | 4018359363406 | schwarz / black | RAL 9011 | 100 pcs. in PE bag |

Modular-Stecker MP6(6) AWG26-24



| Technische Daten / Technical Data | | |
|-----------------------------------|---|-----------------------------------|
| Steckverbinder-Norm | IEC 60603-7 | Connector standard |
| Mechanische Eigenschaften | | Mechanical Characteristics |
| Steckkraft | ≤ 20 N | Insertion force |
| Lebensdauer | ≥ 750 | Life |
| Kabelabzugskraft | min. 50 N | Cable to plug tensile strength |
| Werkstoffe | | Materials |
| Steckergehäuse | PC UL94 V0 glasklar / crystal clear | Connector housing |
| Kontakte | Phosphor Bronze / phosphor bronze | Contacts |
| Richtlinie 2011/65/EU (RoHS) | RoHS-konform / RoHS-compliant | Directive 2011/65/EU (RoHS) |
| Adernanschluss | | Wire connection |
| Cu-Leiterdurchmesser | Massiv / solid 0,4 - 0,51 mm AWG26/1 - AWG24/1 Litze / stranded 0,46 - 0,61 mm AWG27/7 - AWG24/7 | Cu-conductor diameter |
| Aderndurchmesser | 0,85 - 1,02 mm | Core diameter |
| Kabeldurchmesser | 2,0 - 3,5 mm | Cable diameter |

Modular-Stecker MP6(6) AWG26-24



| Technische Daten / Technical Data | | |
|-----------------------------------|----------------------|--|
| Umweltanforderungen | | Environmental Requirements |
| Schutz vor Eindringen | | Protection against ingress |
| Eindringen von Teilchen | IP2X | Particulate ingress |
| Wasser / Untertauchen | IPX0 | Water / Immersion |
| Klimatisch und chemisch | | Climatical and chemical |
| Umgebungstemperatur | -40°C bis / to +70°C | Ambient temperature |
| Elektrische Eigenschaften | | Electrical Characteristics |
| Kontaktwiderstand | ≤ 20 mΩ | Contact resistance |
| Isolationswiderstand | ≥ 500 MΩ | Insulation resistance |
| Spannungsfestigkeit | | Voltage proof |
| Kontakt-Kontakt | ≥ 1000 V, DC | Contact-Contact |
| Strombelastbarkeit bei 50°C | 1 A | Current carrying capacity at 50°C |
| Normen | | Standards |
| IP-Schutzarten | IEC 60529 | Degrees of protection provided by enclosures (IP code) |