



## Cell Type KR-SCH(1.6) Specifications

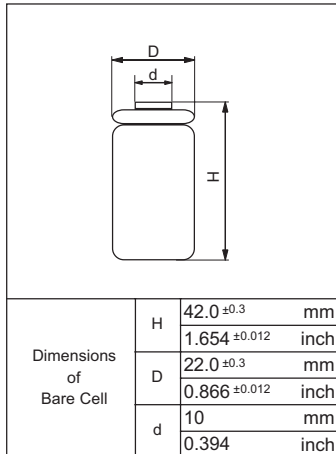


Nominal Capacity		1600mAh
Nominal Voltage		1.2V
Charging Current	Trickle	53mA
	Standard	160mA
Charging Time	Trickle	above 48Hrs.
	Standard	14 to 16Hrs.
Ambient Temperature	Charge	0°C to +70°C [ +32°F to 158°F ]
	Discharge	-20°C to +70°C [ -4°F to 158°F ]
	Storage	-30°C to +70°C [ -22°F to 158°F ]
Internal Impedance (Av.) (at 50% discharge)		6.8mΩ (at 1000Hz)
Weight		49g/1.73oz
Dimensions(D)×(H) (with tube)		22.9 <sup>0</sup> <sub>-1</sub> × 43.0 <sup>0</sup> <sub>-1.2</sub> mm 0.90 <sup>0</sup> <sub>-0.04</sub> × 1.69 <sup>0</sup> <sub>-0.05</sub> inch

### Typical Characteristics


#### Charge

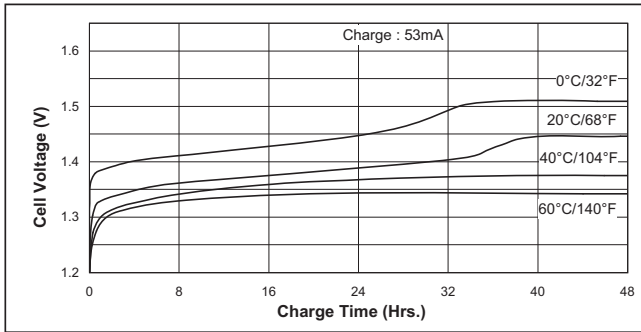


#### Discharge (at high rate)

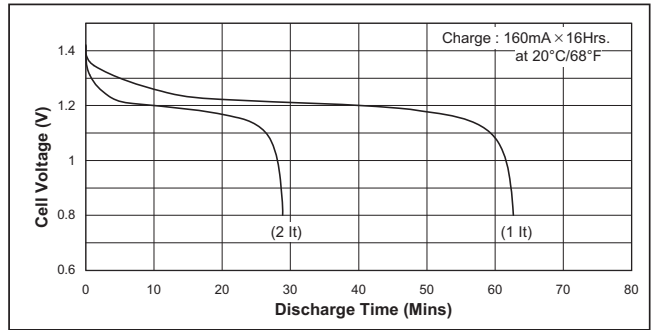


#### Charge

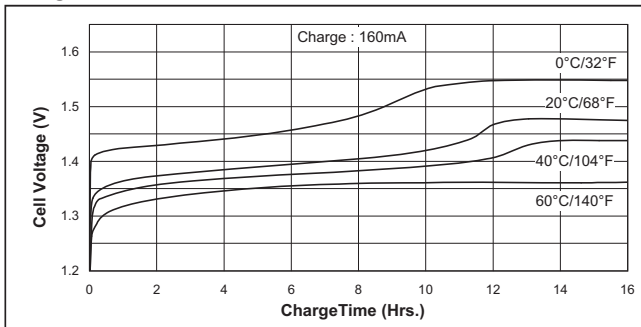

#### Discharge Trickle Charge (at high temperature)

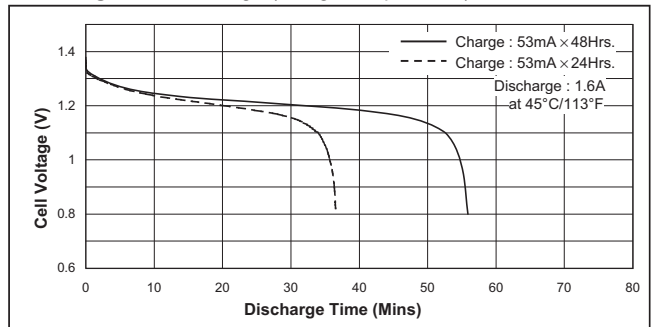

#### Discharge (at low rate)

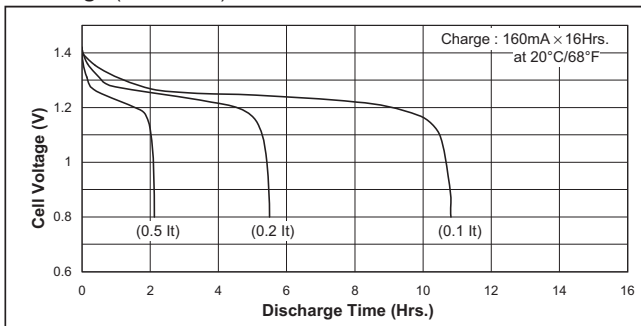

#### Temperature (Charge & Discharge)

