

Fuse Links to BS 1362

Artikel: 900.1077


TDC180

3A & 13A – IEC 269-3-1

Fast Acting

Flink

Rapide

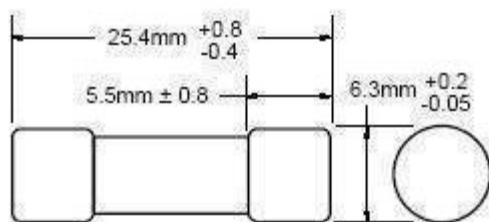

Ceramic tube- end caps: copper, silvered
 Keramikrohr- Kontaktkappen: Kupfer, versilbert
 Tube céramique- capsules: cuivre, argenté

Limits for pre-arcing time / Grenzwerte der Schmelzzeit / Temps de fusion limité

In	1.0 In	1.6 In	1.9 In
	MIN	MIN	MAX
1A- 13A	1000 hours 1000 Stunden 1000 heures	30 min	30 min

Packaging / Verpackung / Emballage: x10, x100, x1000

Weight / Gewicht / Poids : 2.5g

Rated current Nennstrom Courant assigné [In]	Rated voltage Nennspannung Tension assigné (V)	Breaking capacity Schaltvermögen Pouvoir de coupure	Power dissipation Verlustleistung Puissance dissipée	Colour Farbe Couleur	Approvals Approbationen Homologations
1A 2A 3A 5A 7A 10A 13A	240 (264 max)	6000A 264V,50HZ p.f.0.3-0.4	1	black/schwarz/ noir black/schwarz/noir red/rot/rouge black/schwarz/noir black/schwarz/noir brown/braun/brun	Asta, BSI