


## Han D 64 Pos. M Insert Crimp

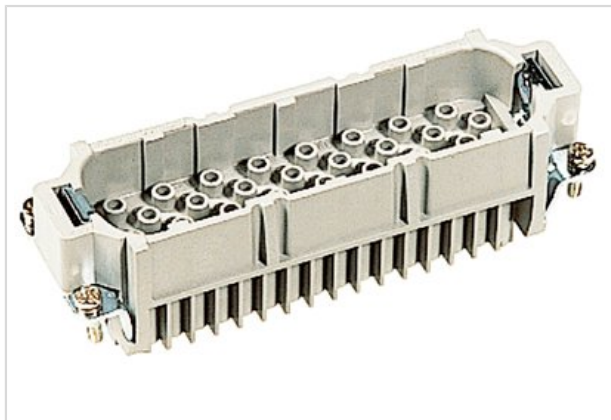

|                    |   |
|--------------------|---|
| Part number        | 09 21 064 3001  |
| Specification      | Han D 64 Pos. M Insert Crimp  |
| HARTING eCatalogue | <a href="https://b2b.harting.com/09210643001">https://b2b.harting.com/09210643001</a> |

### Identification

|          |         |
|----------|---------|
| Category | Inserts |
| Series   | Han D®  |

### Version

|                    |   |
|--------------------|---|
| Termination method | Crimp termination                       |
| Gender             | Male                                    |
| Size               | 24 B                                    |
| Number of contacts | 64                                      |
| PE contact         | Yes                                     |
| Details            | Please order crimp contacts separately. |

### Technical characteristics

|                           |                              |
|---------------------------|------------------------------|
| Conductor cross-section   | 0.14 ... 2.5 mm <sup>2</sup> |
| Rated current             | 10 A                         |
| Rated voltage             | 250 V                        |
| Rated impulse voltage     | 4 kV                         |
| Pollution degree          | 3                            |
| Rated voltage acc. to UL  | 600 V                        |
| Rated voltage acc. to CSA | 600 V                        |
| Insulation resistance     | ≥10 <sup>10</sup> Ω          |
| Limiting temperature      | -40 ... +125 °C              |
| Mating cycles             | ≥500                         |

### Material properties

|   |                        |
|---|------------------------|
| Material (insert)                         | Polycarbonate          |
| Colour (insert)                           | RAL 7032 (pebble grey) |
| Material flammability class acc. to UL 94 | V-0                    |
| RoHS                                      | compliant              |



Pushing Performance

## Material properties

|                             |           |
|-----------------------------|-----------|
| ELV status                  | compliant |
| China RoHS                  | e         |
| REACH Annex XVII substances | No        |
| REACH ANNEX XIV substances  | No        |
| REACH SVHC substances       | No        |

## Specifications and approvals

|                |                                   |
|----------------|-----------------------------------|
| Specifications | EN 60664-1                        |
|                | IEC 61984                         |
|                | EN 175301-801                     |
| Approvals      | DNV GL                            |
| UL / CSA       | UL 1977 ECBT2.E235076             |
|                | CSA-C22.2 No. 182.3 ECBT8.E235076 |

## Commercial data

|                                |          |
|--------------------------------|----------|
| Packaging size                 | 1        |
| Net weight                     | 68.1 g   |
| Country of origin              | Romania  |
| European customs tariff number | 85389099 |