


ALFL 10.5030.1


AllFive (36W, 1xLED 36W 830/3000K 6100lm)

— C0/C180 cd / 1000 lm - - - C90/C270

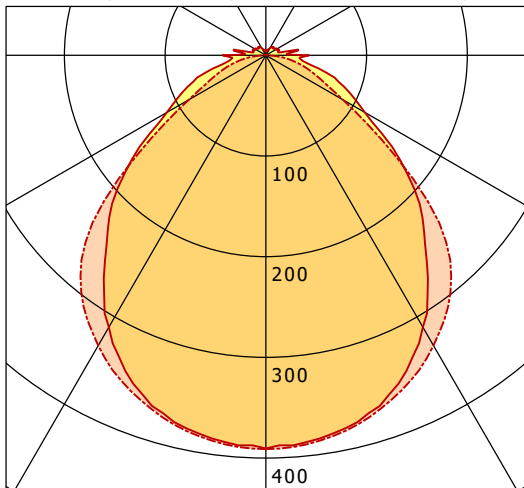

	C0	C90	C180	C270
0°	390	391	390	391
15°	372	376	372	376
30°	312	333	312	333
45°	218	249	218	249
60°	114	88	114	88
75°	58	36	58	36
90°	43	1	43	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

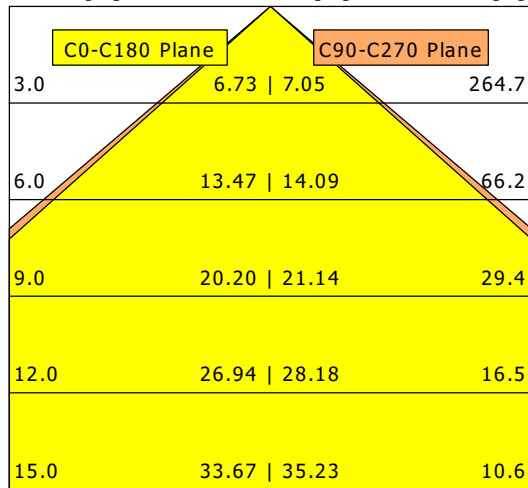

η	LED
Efficiency	169 lm/W
Direct/Indirect	↓ 94% / ↑ 6%
System Power	36 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	24.1
UGR C90/C270	22.3
CIE Flux Codes	54 83 95 94 100
Ra/CRI	> 80