



# BTNM 101.40.55

Button Mini 100 (1xLED 15W 840/4000K 1280lm 55 °)

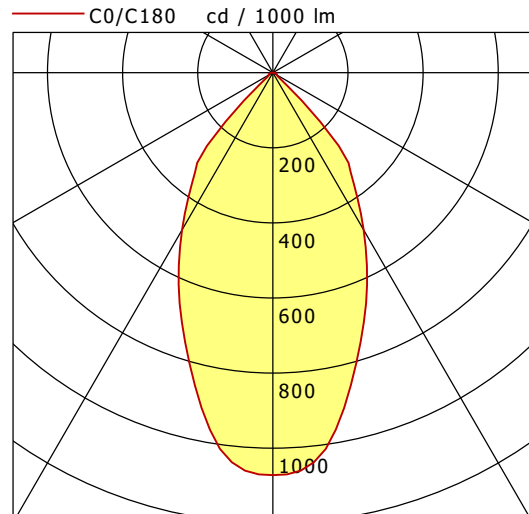

	C0	C90	C180	C270
0°	1072	1072	1072	1072
15°	831	831	831	831
30°	484	484	484	484
45°	143	143	143	143
60°	12	12	12	12
75°	9	9	9	9
90°	0	0	0	0
cd / 1000 lm				

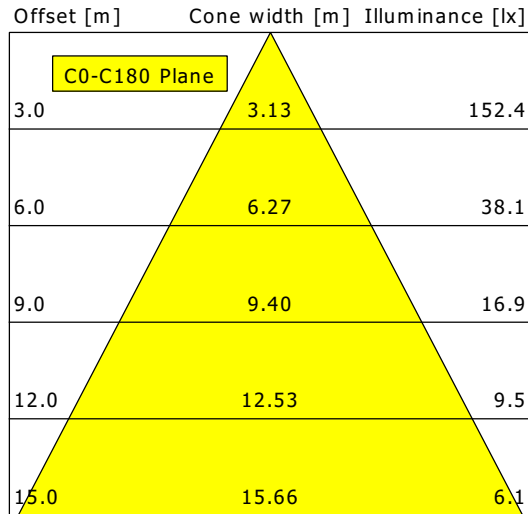

<b>η</b>	LED
Efficiency	85 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	15 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.9
UGR C90/C270	23.9
CIE Flux Codes	87 97 99 100 100
Ra/CRI	>80