



BTNM 202.40.55

Button Mini 200 (1xLED 24W 840/4000K 2500lm 55 °)

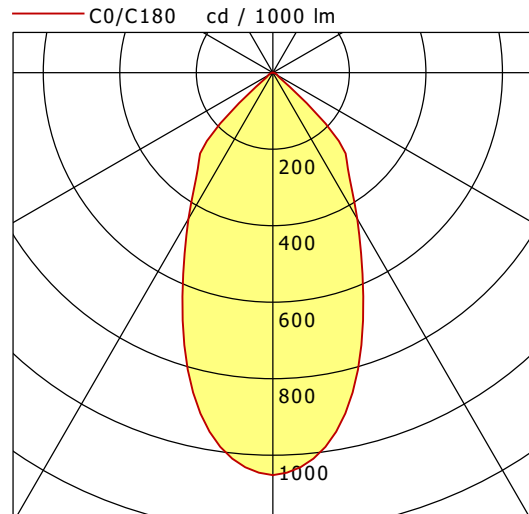

	C0	C90	C180	C270
0°	1052	1052	1052	1052
15°	835	835	835	835
30°	441	441	441	441
45°	223	223	223	223
60°	15	15	15	15
75°	6	6	6	6
90°	0	0	0	0
cd / 1000 lm				

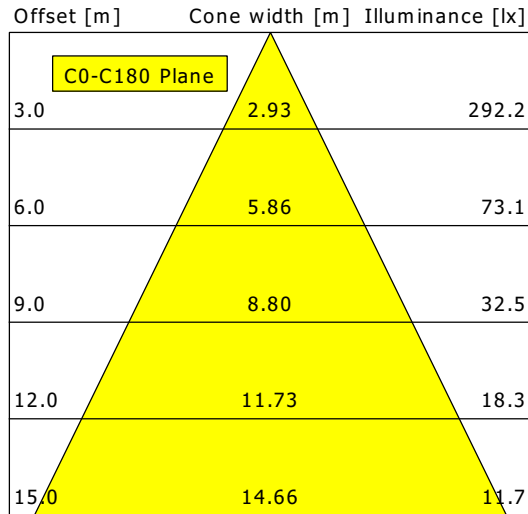

η	LED
Efficiency	104 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	24 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.7
UGR C90/C270	23.7
CIE Flux Codes	84 98 100 100 100
Ra/CRI	>80