


# OPT-R 102.0600.TWL/DALI


Optico | Recessed (6000 K, 1xLED 30W 860/6000K 2090lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

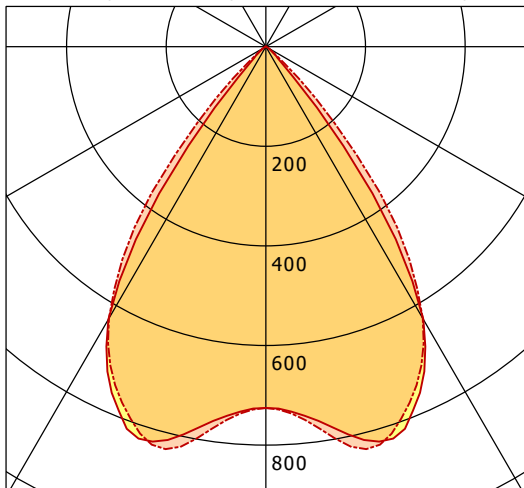

	C0	C90	C180	C270
0°	726	726	726	726
15°	820	834	820	834
30°	632	630	632	630
45°	39	117	39	117
60°	7	6	7	6
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

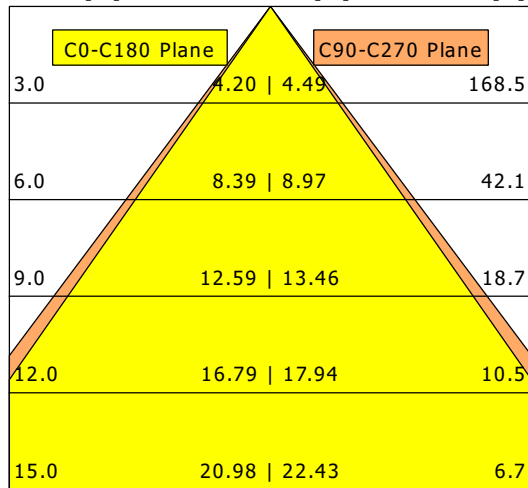

<b>η</b>	LED
Efficiency	70 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	30 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	<10.0
UGR C90/C270	10.6
CIE Flux Codes	93 100 100 100 100
Ra/CRI	>85