



# TPSF 182.2030.11

Topas Flat Recessed (1xLED 22W 830/3000K 1930lm 65 °)

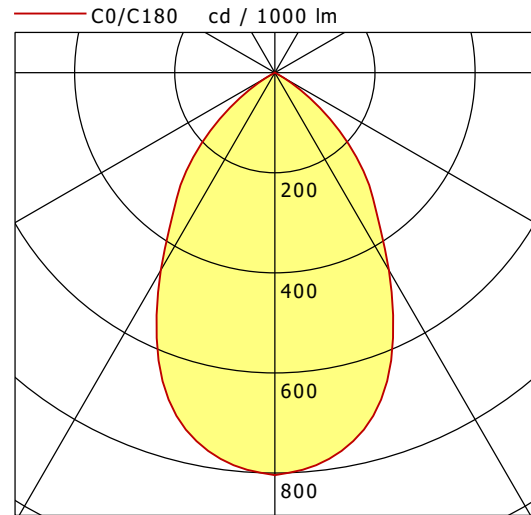

	C0	C90	C180	C270
0°	804	804	804	804
15°	725	725	725	725
30°	456	456	456	456
45°	219	219	219	219
60°	21	21	21	21
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

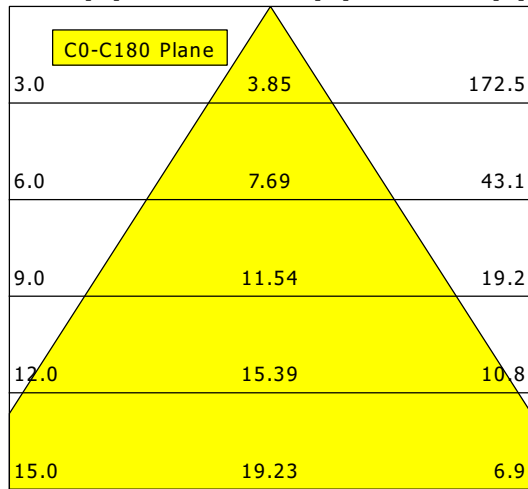

<b>η</b>	LED
Efficiency	88 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	22 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.5
UGR C90/C270	20.5
CIE Flux Codes	79 100 100 100 100
Ra/CRI	> 80