



VTFL 10.2530/DALI

Vale-Tu Flat Large (1xLED 32W 830/3000K 2850lm)

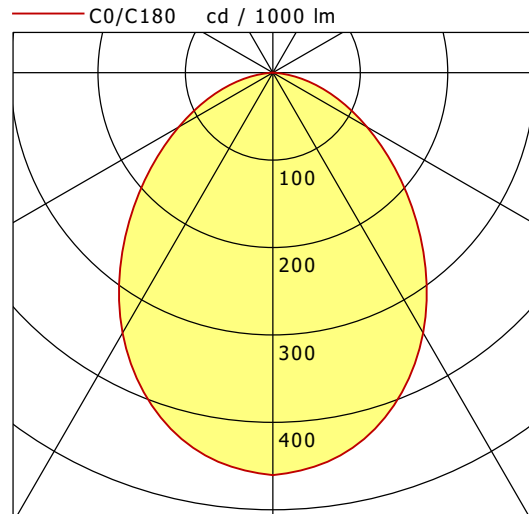

	C0	C90	C180	C270
0°	460	460	460	460
15°	428	428	428	428
30°	344	344	344	344
45°	229	229	229	229
60°	124	124	124	124
75°	47	47	47	47
90°	0	0	0	0
cd / 1000 lm				

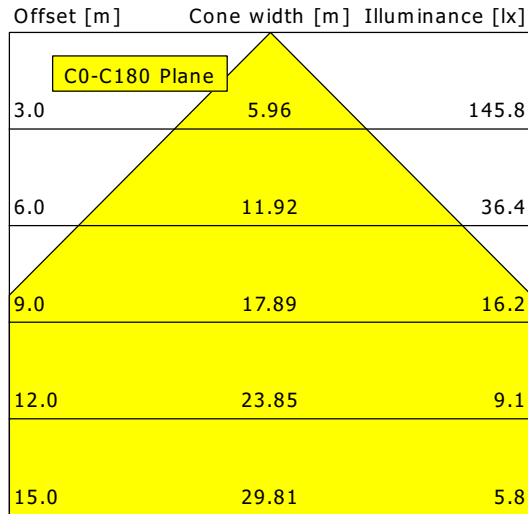

η	LED
Efficiency	89 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	32 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	27.0
UGR C90/C270	27.0
CIE Flux Codes	55 84 97 100 100
Ra/CRI	>80