



# VTFM 10.1540/DALI

Vale-Tu Flat Medium (1xLED 21W 840/4000K 1990lm)

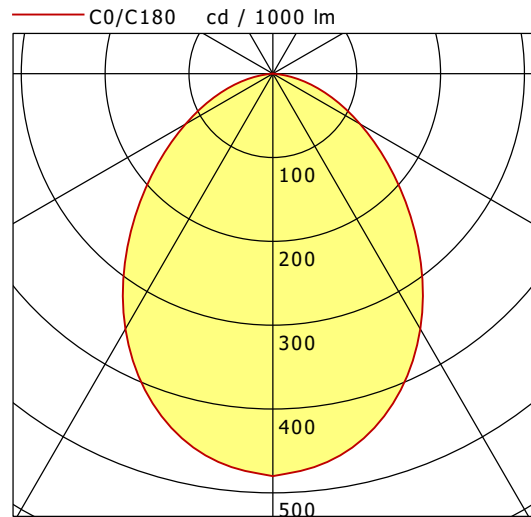

	C0	C90	C180	C270
0°	480	480	480	480
15°	444	444	444	444
30°	352	352	352	352
45°	228	228	228	228
60°	120	120	120	120
75°	43	43	43	43
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

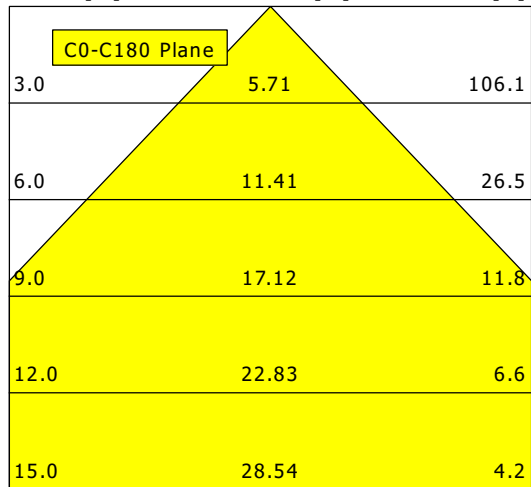

<b>η</b>	LED
Efficiency	95 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	21 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	26.6
UGR C90/C270	26.6
CIE Flux Codes	57 86 98 100 100
Ra/CRI	>80