



BIXX-T 102.840.35

Bixx Evo (1xLED 24W 840/4000K 2880lm 35°)

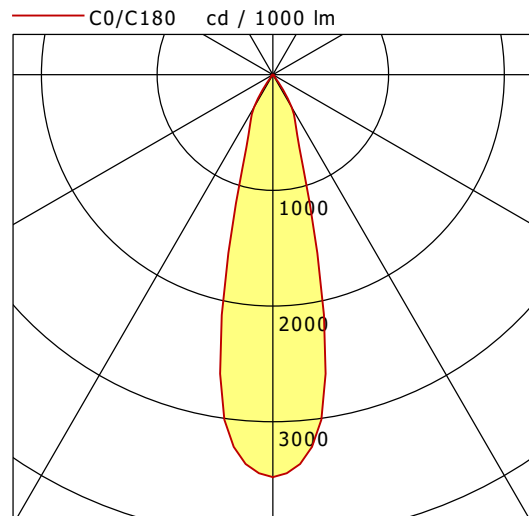

	C0	C90	C180	C270
0°	3479	3479	3479	3479
15°	1358	1358	1358	1358
30°	326	326	326	326
45°	6	6	6	6
60°	7	7	7	7
75°	1	1	1	1
90°	0	0	0	0
cd / 1000 lm				

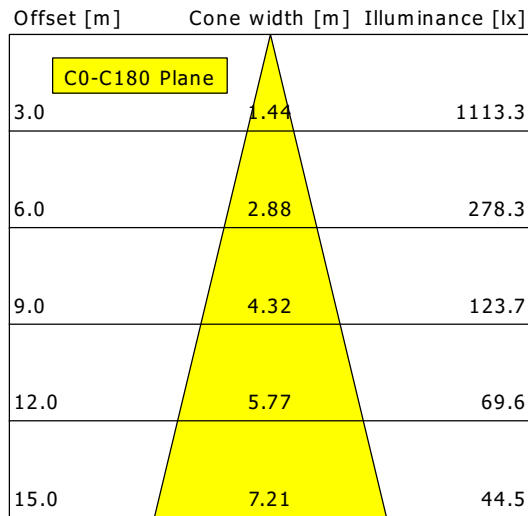

η	LED
Efficiency	120 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	24 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.9
UGR C90/C270	16.9
CIE Flux Codes	98 100 100 100 100
Ra/CRI	>80