



BIXX-T 102.840.50

Bixx Evo (1xLED 24W 840/4000K 2800lm 50°)

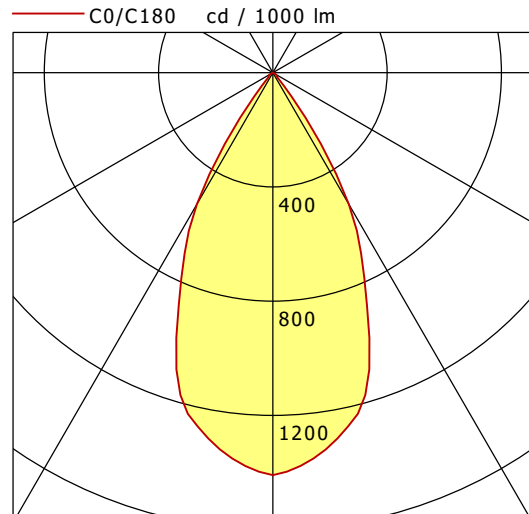

	C0	C90	C180	C270
0°	1409	1409	1409	1409
15°	1206	1206	1206	1206
30°	532	532	532	532
45°	21	21	21	21
60°	9	9	9	9
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

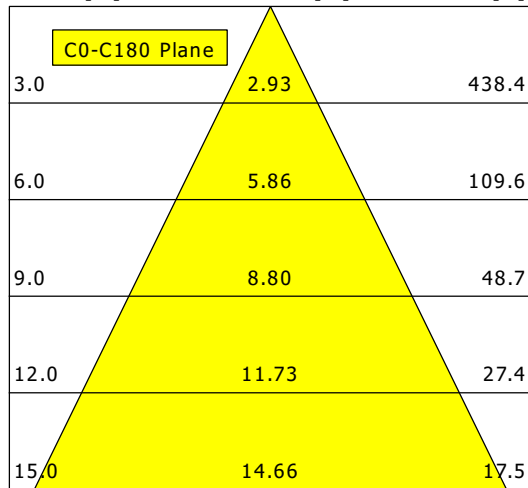

η	LED
Efficiency	117 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	24 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.6
UGR C90/C270	20.6
CIE Flux Codes	96 99 100 100 100
Ra/CRI	>80