

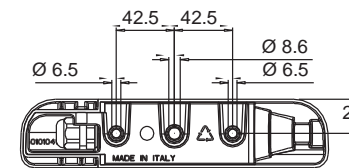
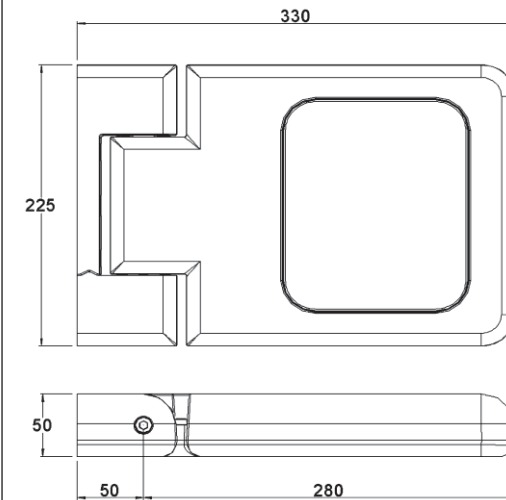
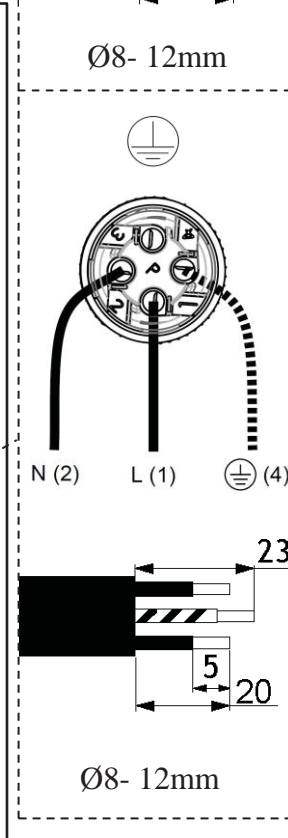
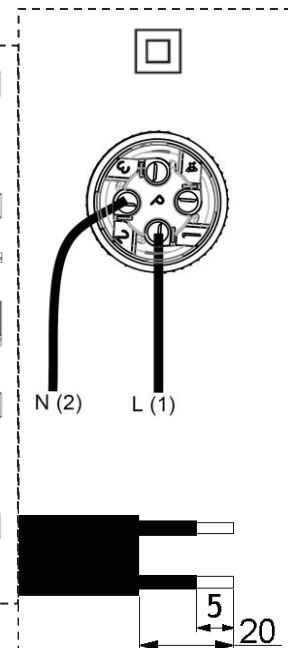
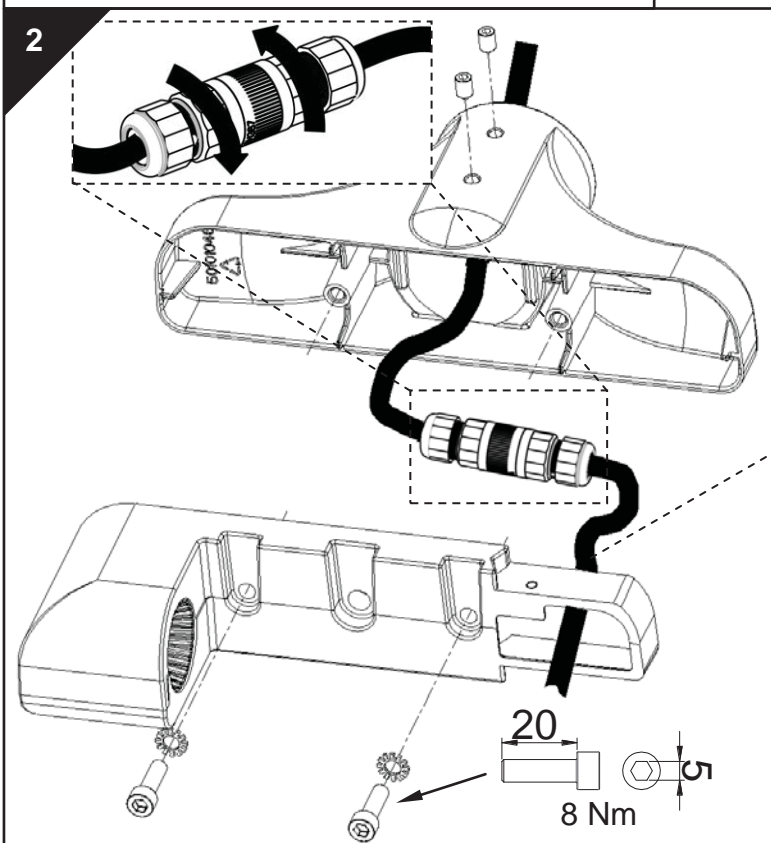


[CZ] Montážní návod	[LT] Montavimo Instrukcijos	[NO] Monteringsanvisning
[DE] Montageanleitung	[LV] Instalācijas instrukcija	[PL] Instrukcja montażu
[DK] Monteringsvejledning	[FR] Notice de montage	[RU] Инструкция по монтажу
[EE] Paigaldusjuhend	[HU] Szerelési útmutató	[SE] Installationsanvisning
[FI] Asennusohje	[IT] Istruzioni di montaggio	[UK] Installation Instructions





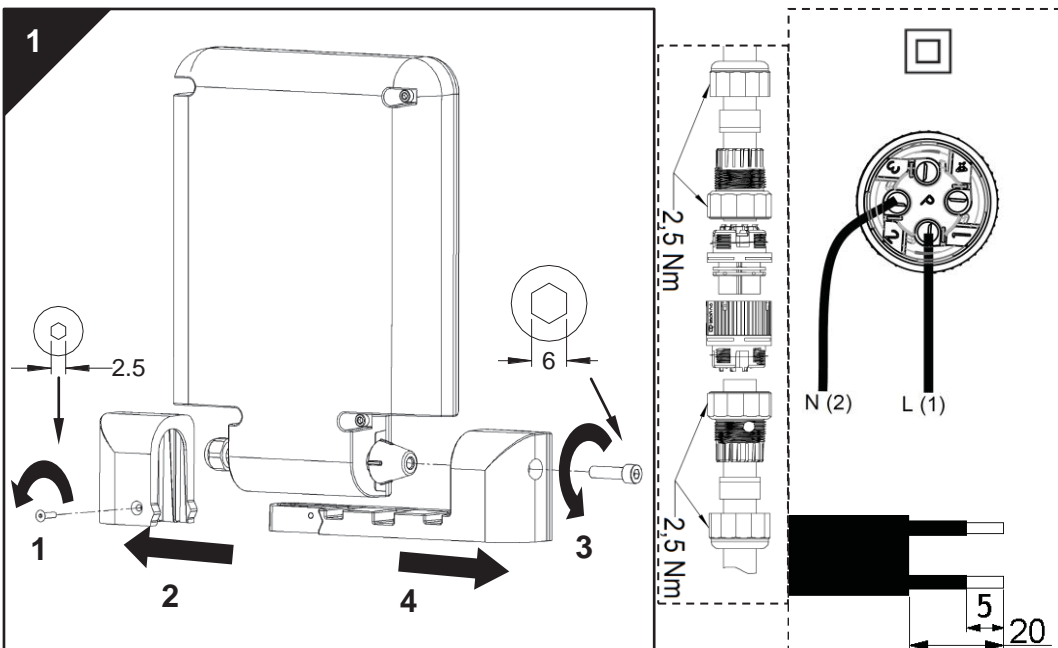


SCX = 0,07 m²
 = 3.0 Kg

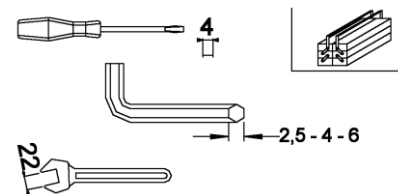

IP66 IK08
 Ta +25°C

<p>Gruppo di Rischio Esente secondo norma EN 62471:2008 alla distanza di :</p> <ul style="list-style-type: none"> - 2100 mm con Lente Stradale (500lx) - 1000 mm con Lente A/D <p>Gruppo di Rischio "1" secondo norma EN 62471:2008 alla distanza di :</p> <ul style="list-style-type: none"> - 1000 mm con lente ROC 	<p>Risk category Exempt according to the EN 62471:2008 norm, at a distance of :</p> <ul style="list-style-type: none"> - 2100 mm with Street Lens (500lx) - 1000 mm with Asymmetrical Lens <p>Risk category "1" according to the EN 62471:2008 norm, at a distance of :</p> <ul style="list-style-type: none"> - 1000 mm with ROC lens
--	---

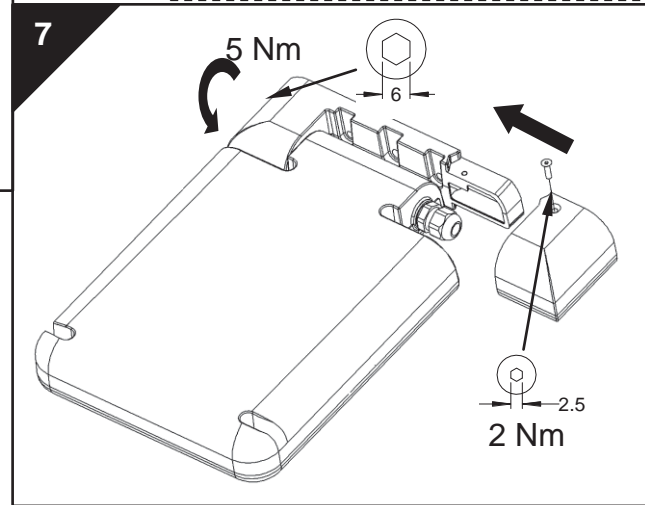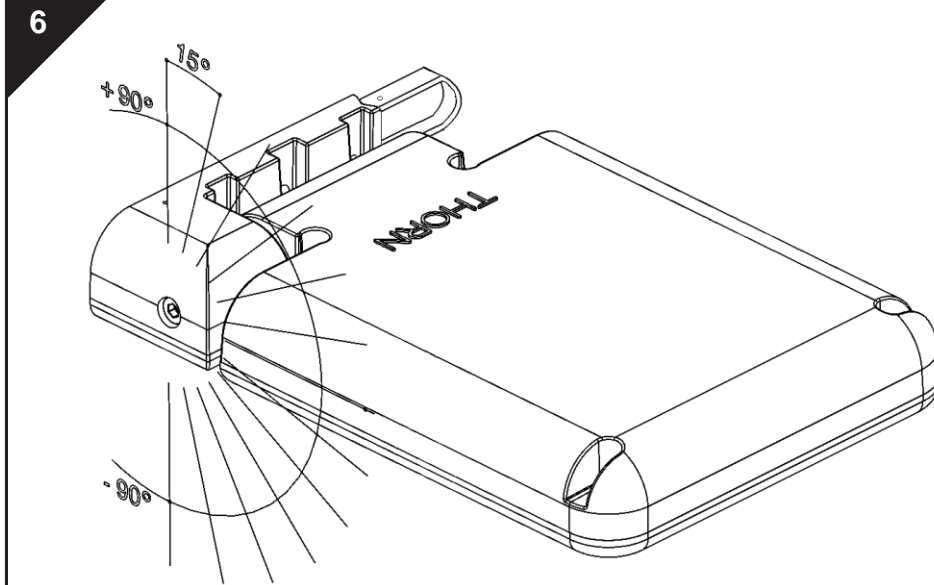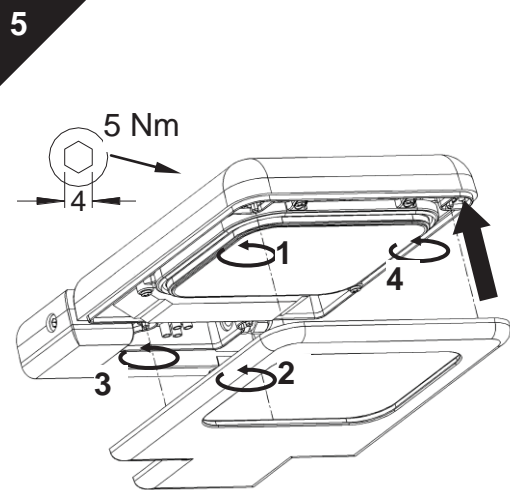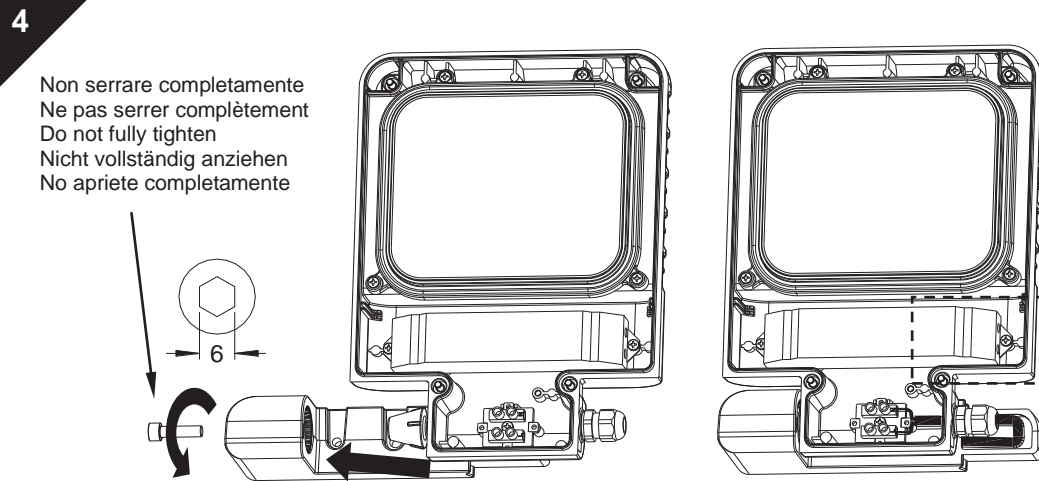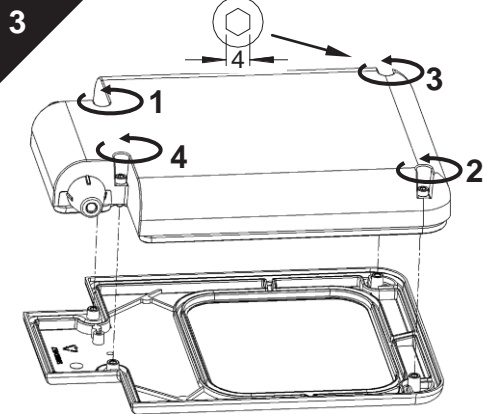

DIP switches setting	Iout [mA]	Light output	Dimming
ON 4 OFF	350	54%	ON
ON 4 OFF	700	100%	OFF

Dimming ON

100%
54%
5 hours
5 hours