


# CHOCM-R 140.830.80.02/DALI


Choc | Recessed (1xLED 8W 830/3000K 810lm 80 °)

— C0/C180 cd / 1000 lm    - - - C90/C270

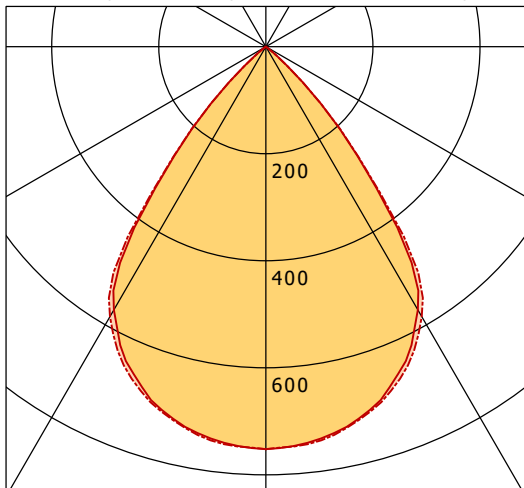

	C0	C90	C180	C270
0°	752	752	752	752
15°	711	714	711	714
30°	568	582	568	582
45°	121	120	121	120
60°	0	0	0	0
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

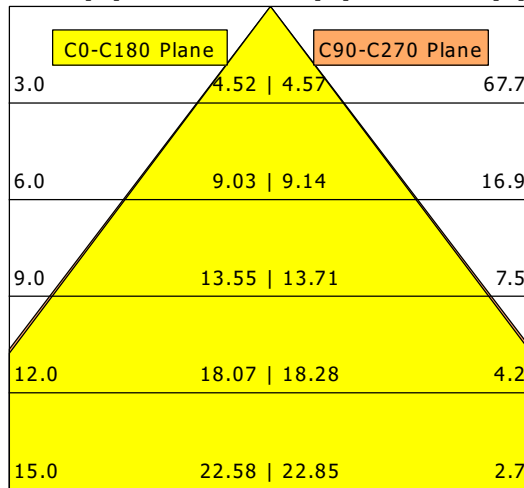

<b>η</b>	LED
Efficiency	101 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	8 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.7
UGR C90/C270	18.7
CIE Flux Codes	88 100 100 100 100
Ra/CRI	>80