


CHOCM-R 220.830.80.02/DALI

Choc | Recessed (1xLED 7W 830/3000K 760lm 80 °)

— C0/C180 cd / 1000 lm - - - C90/C270

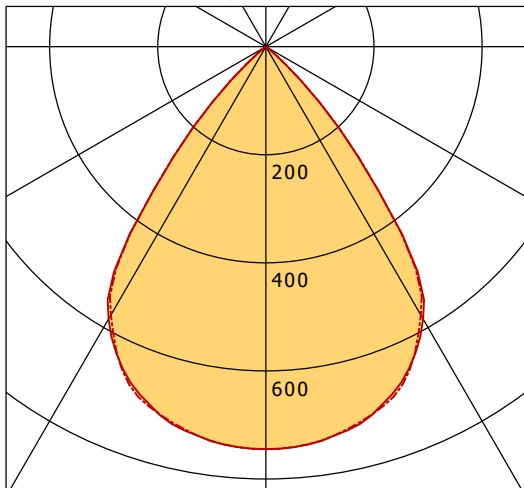

	C0	C90	C180	C270
0°	745	745	745	745
15°	715	713	715	713
30°	582	573	582	573
45°	114	115	114	115
60°	0	0	0	0
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

Offset [m]	Cone width [m]	Illuminance [lx]
3.0	4.55 4.55	62.9
6.0	9.10 9.10	15.7
9.0	13.65 13.65	7.0
12.0	18.20 18.20	3.9
15.0	22.75 22.75	2.5

η	LED
Efficiency	109 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	7 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.7
UGR C90/C270	18.7
CIE Flux Codes	89 100 100 100 100
Ra/CRI	>80