


# OPT-P 115.840.1/DALI

Optico | Pendant (1xLED 116W 840/4000K 14700lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

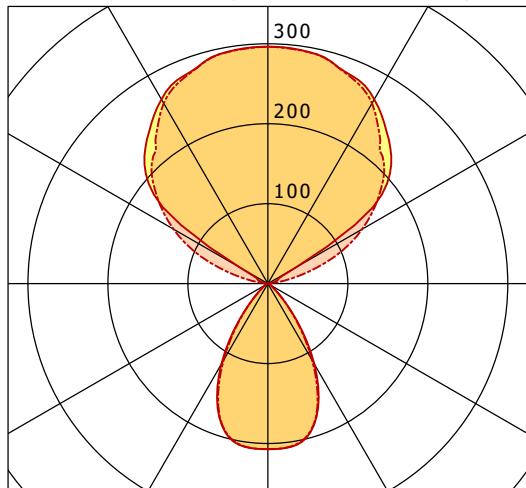

	C0	C90	C180	C270
0°	207	207	207	207
30°	116	111	116	111
60°	4	4	4	4
90°	0	0	0	0
120°	40	136	40	136
150°	266	261	266	261
180°	296	296	296	296
cd / 1000 lm				

LDC unsuitable for cone representation.  
The C0 angle is oversized.

<b>η</b>	LED
Efficiency	127 lm/W
Direct/Indirect	↓ 22% / ↑ 78%
System Power	116 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	< 10.0
UGR C90/C270	< 10.0
CIE Flux Codes	89 99 100 22 100
Ra/CRI	> 80