


wall mounting socket outlet domestic type - housing  
 dimensions 90x90

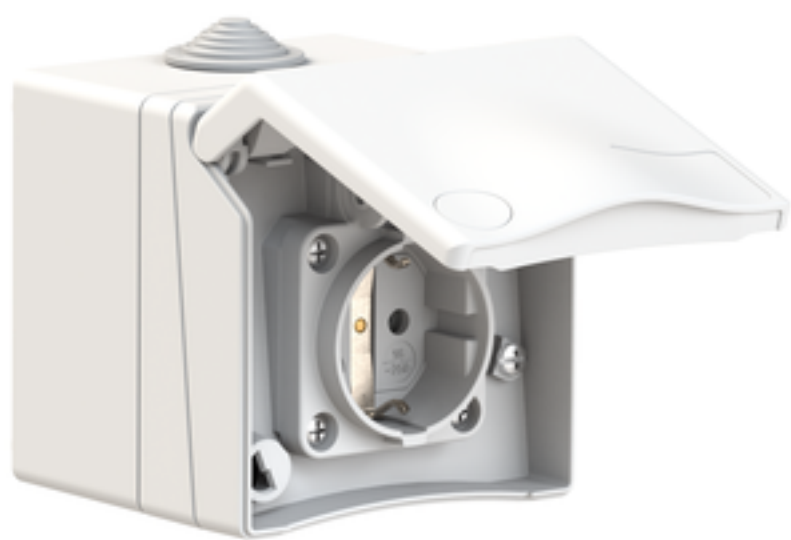


| Product description   |                                                |
|-----------------------|------------------------------------------------|
| BALS-Prd.-Nr          | 72010                                          |
| EAN                   | 4024941222396                                  |
| Product category      | Domestic wall mounting socket outlet, straight |
| Current               | 16A                                            |
| Number of poles       | 3p                                             |
| Arrangement of phases | 2P+PE                                          |
| Voltage               | 250V~                                          |
| Frequency             | AC                                             |

| Product description    |                                      |
|------------------------|--------------------------------------|
| Protection degree      | IP44                                 |
| Colour of appliance    | white similar to RAL 9016            |
| Connection design      | screwless                            |
| Maximum conductor size | 2,5 qmm                              |
| Cable entry            | Anti-kink sleeve                     |
| Height                 | 90mm                                 |
| Width                  | 90mm                                 |
| Depth                  | 95mm                                 |
| Dimension of enclosure | 90x90 mm                             |
| Material of enclosure  | ABS + Polycarbonate                  |
| Contacts               | the contacts are brass nickel plated |

| Additional technical properties |                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                 | The cable entry is one at top open and one at bottom and one rear side closed, Architecture programme TH, hinged lid with labelling field (optional: key lock) |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.245 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |
| EAN            | 4024941222396    |
| Length         | 95 mm            |

| Logistics data |               |
|----------------|---------------|
| Width          | 90 mm         |
| Height         | 90 mm         |
| Weight         | 0.246 kg      |
| Volume         | 769.5 ccm     |
| Packaging      | Carton        |
| Content amount | 6 ST          |
| EAN            | 4024941222662 |
| Length         | 370 mm        |
| Width          | 218 mm        |
| Height         | 125 mm        |
| Weight         | 1.643 kg      |
| Volume         | 9,329.4 ccm   |

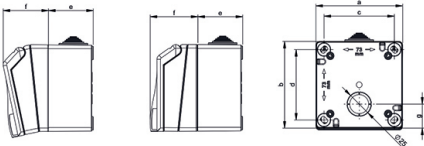

| Ampere Poles   | 16 3 | 16 4 | 16 5 | 32 5 | Schutzk. Domestic |
|----------------|------|------|------|------|-------------------|
| a              | 90,0 | 90,0 | 90,0 | 90,0 | 90,0              |
| b              | 90,0 | 90,0 | 90,0 | 90,0 | 90,0              |
| c              | 73,0 | 73,0 | 73,0 | 73,0 | 73,0              |
| d              | 73,0 | 73,0 | 73,0 | 73,0 | 73,0              |
| e              | 47,0 | 47,0 | 47,0 | 47,0 | 47,0              |
| f              | 48,0 | 48,0 | 48,0 | 48,0 | 48,0              |
| g              | 25,0 | 25,0 | 25,0 | 25,0 | 25,0              |
| Cond. mm² min. | 1,0  | 1,0  | 1,0  | 2,5  | 1,0               |
| Cond. mm² max. | 4,0  | 4,0  | 4,0  | 10   | 2,5               |
|                |      |      |      |      |                   |
|                |      |      |      |      |                   |
|                |      |      |      |      |                   |

4MB463