

wall mounting appliance inlet - with hinged cover




| Product description | |
|---------------------------|-------------------------------|
| BALS-Prd.-Nr | 24017 |
| EAN | 4024941240178 |
| Product category | Wall mounting appliance inlet |
| Current | 32A |
| Number of poles | 3p |
| Arrangement of phases | 2P+PE |
| Position of earth contact | 6 h |
| Voltage | 200 - 250V~ |
| Frequency | 50/60Hz |

| Product description | |
|------------------------|---|
| Protection degree | IP44 |
| Colour code | blue RAL 5015 |
| Colour of appliance | Collar blue RAL 5015, Hinged lid grey RAL 7035, Enclosure grey RAL 7035 |
| Connection design | with screw terminal |
| Maximum conductor size | 6,0 qmm |
| Cable entry | top entry M25 |
| Height | 147mm |
| Width | 90mm |
| Depth | 117mm |
| Dimension of enclosure | 75x90 mm (HxW) |
| Material of enclosure | Polyamide |
| Contacts | The contact carrier is made of polyamide, The contacts are brass |

| Additional technical properties | |
|---------------------------------|--|
| | The cable entry is one at top open and one rear sided closed |
| | With hinged lid |

| Logistics data | |
|----------------|-----------------|
| Weight/pcs | 0.31 kg / Piece |
| Packaging | Bag |
| Content amount | 1 ST |

| Logistics data | |
|----------------|---------------|
| EAN | 4024941240178 |
| Length | 117 mm |
| Width | 90 mm |
| Height | 147 mm |
| Weight | 0.311 kg |
| Volume | 1,547.91 ccm |
| Packaging | Carton |
| Content amount | 10 ST |
| EAN | 4024941832694 |
| Length | 325 mm |
| Width | 217 mm |
| Height | 210 mm |
| Weight | 3.306 kg |
| Volume | 13,588.4 ccm |

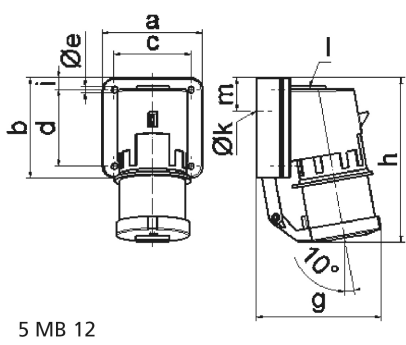

5 MB 12

| Ampere | 16 | 32 | 32 | 32 |
|----------------------------|-------|-------|-------|-------|
| Polzahl | 5 | 3 | 4 | 5 |
| a | 84,0 | 90,0 | 90,0 | 90,0 |
| b | 84,0 | 75,0 | 75,0 | 75,0 |
| c | 64,0 | 78,0 | 78,0 | 78,0 |
| d | 64,0 | 45,0 | 45,0 | 45,0 |
| e ø | 5,5 | 5,5 | 5,5 | 5,5 |
| g | 105,0 | 114,0 | 114,0 | 115,0 |
| h | 138,0 | 149,0 | 149,0 | 150,0 |
| i | 10,0 | 13,0 | 13,0 | 13,0 |
| k ø | 23,0 | 29,0 | 29,0 | 29,0 |
| l | M20 | M25 | M25 | M25 |
| m | 28,0 | 27,0 | 27,0 | 27,0 |
| Leiter mm ² min | 1 | 2,5 | 2,5 | 2,5 |
| Leiter mm ² max | 2,5 | 6 | 6 | 6 |