


**Kabelverschraubungen**  
Messing-Vernickelt PG

**Presse-étoupes**  
Laiton nickelé PG

**Cable glands**  
Nickel-plated brass PG

# DIN 46320-C4-MS (PG)

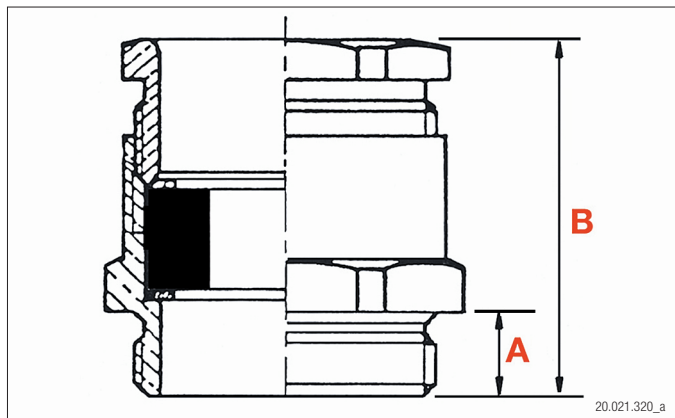

**MAT** Messing vernickelt  
Laiton nickelé  
Nickel plated brass

**RoHS**

**TEMP** -40°C bis + 100°C  
-40°C à + 100°C  
-40°C to + 100°C

IP 65 bis 5 bar  
IP 65 à 5 bar  
IP 65 to 5 bar

Weichgummi 60 shore  
Caoutchouc 60 shore  
Rubber 60 shore

## Kabelverschraubung DIN 46320-C4-MS sechskant

\* Mit ausschneidbarem, vorgestanztem öl- und benzinbeständigem Dichtring.

## Presse-étoupe DIN 46320-C4-MS à six pans

\* Avec joint lamellé à découper. Résistant aux huiles minérales et à l'essence.

## Cable gland DIN 46320-C4-MS hexagonal

\* With multiperforated seal ring made of oil and petrol-resistant rubber.

	$\langle \text{Ø} \rangle$ mm	<b>A</b> mm	<b>B</b> mm	 mm		Plica-Nr.	E-Nr.	VE
PG7	5-7	5.0	21.0	14/13	vernickelt	92.4008.006	121 020 069	100
PG9*	2-9	6.0	23.0	17/15	vernickelt	92.4009.100	121 020 189	50
PG9	6-8	6.0	23.0	17/15	vernickelt	92.4008.103	121 020 159	50
PG11*	4-11	6.0	23.0	20/18	vernickelt	92.4009.207	121 020 289	50
			17.0	18	vernickelt	92.4006.208	121 000 289	50
PG11	8-10	6.0	23.0	20/18	vernickelt	92.4008.200	121 020 259	50
PG13.5*	4.5-12	6.5	26.0	22/20	vernickelt	92.4009.304	121 020 389	50
PG13.5	10-12	6.5	26.0	22/20	vernickelt	92.4008.308	121 020 359	50
PG16*	5.5-14.5	6.5	27.0	24/22	vernickelt	92.4009.401	121 020 489	50
PG16	12-14	6.5	27.0	24/22	vernickelt	92.4008.405	121 020 459	50
PG21*	8-19	7.0	30.0	30/28	vernickelt	92.4009.509	121 020 589	50
PG21	15-17	7.0	30.0	30/28	vernickelt	92.4008.502	121 020 559	50
PG29*	12-27	8.0	33.0	40/37	vernickelt	92.4009.550	121 020 689	25
PG29	24-26	8.0	33.0	40/37	vernickelt	92.4008.553	121 020 659	25
PG36*	22-33	9.0	40.0	50/47	vernickelt	92.4009.606	121 020 789	10
PG36	31-35	9.0	40.0	50/47	vernickelt	92.4008.600	121 020 759	10
PG42*	29-40	10.0	44.0	57/54	vernickelt	92.4009.653	121 021 979	10
PG42	39-41	10.0	44.0	57/54	vernickelt	92.4008.650	121 021 969	10
PG48*	30-45	10.0	46.0	64/60	vernickelt	92.4009.704	121 020 979	5
PG48	44-46	10.0	46.0	64/60	vernickelt	92.4008.707	121 020 959	5

Technische Änderungen vorbehalten – Sous réserve de changements techniques – Technical alterations reserved