


**Kabelverschraubungen**  
Messing vernickelt KV metr.

**Presse-étoupes**  
Laiton nickelé KV métrique

**Cable glands**  
Nickel-plated brass KV metric

# DIN 46320-C4-MS (metr.)

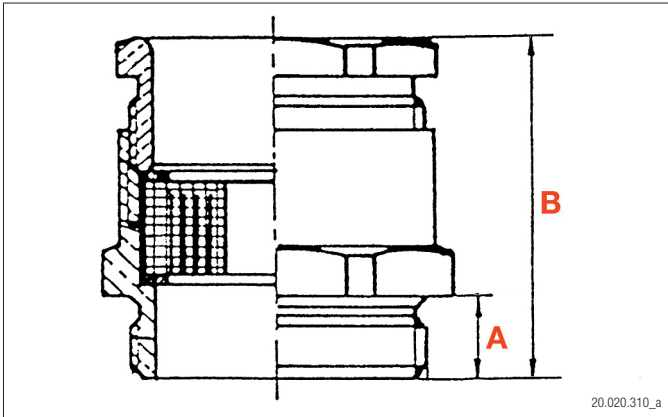

**MAT** Messing vernickelt  
Laiton nickelé  
Nickel plated brass

**RoHS**

**TEMP** -25°C bis + 100°C  
-25°C à + 100°C  
-25°C to + 100°C

IP 65 bis 5 bar  
IP 65 à 5 bar  
IP 65 to 5 bar

Neopren 50  
Néoprène 50  
Neopren 50

## Kabelverschraubung DIN 46320-C4-MS sechskant

\* Mit ausschneidbarem, vorgestanztem öl- und benzinbeständigem Dichtring.

## Presse-étoupe DIN 46320-C4-MS à six pans

\* Avec joint lamellé à découper. Résistant aux huiles minérales et à l'essence.

## Cable gland DIN 46320-C4-MS hexagonal

\* With multiperforated seal ring made of oil and petrol-resistant rubber.

	$\gt; \phi <$ mm	<b>A</b> mm	<b>B</b> mm	 mm		Plica-Nr.	E-Nr.	VE
M12*	4-6	7.0	23.0	14/13	vernickelt	92.4009.812	121 021 303	50
M12	5-7	7.0	23.0	14/13	vernickelt	92.4008.912	121 020 303	50
M16*	4-9.5	7.0	23.0	18/15	vernickelt	92.4009.816	121 021 403	50
M16	6-8	7.0	23.0	18/15	vernickelt	92.4008.916	121 020 403	50
M20*	4-11.5	7.0	23.0	22/18	vernickelt	92.4009.820	121 021 503	50
M20	10-12	7.0	28.0	22/20	vernickelt	92.4008.921	121 020 513	50
M20*	6-13	7.0	28.0	22/20	vernickelt	92.4009.821	121 021 513	50
M20	8-10	7.0	29.0	22/18	vernickelt	92.4008.920	121 020 503	50
M25*	6-15	8.0	29.0	27/22	vernickelt	92.4009.825	121 021 603	20
	12-14	8.0	29.0	27/22	vernickelt	92.4008.925	121 020 603	20
M32*	9-20	8.5	32.5	34/28	vernickelt	92.4009.832	121 021 703	20
M32	15-17	8.5	32.5	34/28	vernickelt	92.4008.932	121 020 703	20
M40*	15-27	8.5	34.0	42/37	vernickelt	92.4009.840	121 021 803	20
M40	24-26	8.5	34.0	42/37	vernickelt	92.4008.940	121 020 803	20
M50*	21-33	9.5	40.0	52/47	vernickelt	92.4009.850	121 021 903	10
M50	31-33	9.5	40.0	52/47	vernickelt	92.4008.950	121 020 903	10
M63*	27-40	10.5	45.0	65/54	vernickelt	92.4009.863	121 021 913	5
M63	39-41	10.5	45.0	65/54	vernickelt	92.4008.963	121 020 913	5
M75*	34-45	11.5	48.0	80/60	vernickelt	92.4009.875	121 021 923	1
M75	44-46	11.5	48.0	80/60	vernickelt	92.4008.975	121 020 923	1

Technische Änderungen vorbehalten – Sous réserve de changements techniques – Technical alterations reserved