


O-RING NBR (metr.)

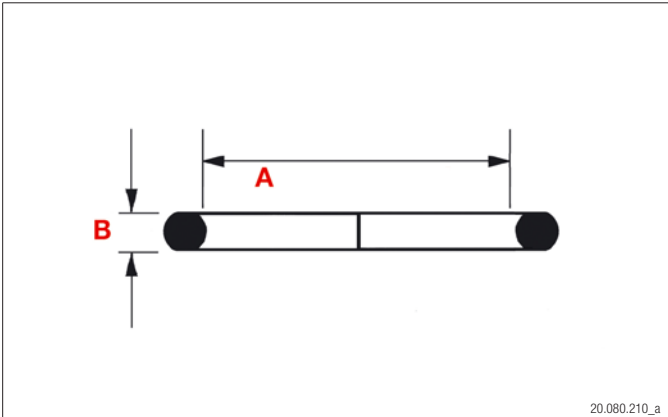

| | |
|-------------|---|
| MAT | Nitril 70 Nitrile 70 Nitrile 70 |
| TEMP | -25°C bis +120°C -25°C à +120°C -25°C to +120°C |
| HALO | halogenfrei sans halogène halogen free |
| UV | UV-beständig UV-résistant UV-resistant |

O-Ring NBR

Aus Nitril, beständig gegen mineralische Öl, Benzin und Säuren.

Joint torique NBR

En Nitrile, résistant aux huiles minérales, essences et acides.

O-ring NBR

Of Nitrile, resistant to mineral oil, gasoline and acids.

| NORM metr. | A mm | B mm | | Plica-Nr. | E-Nr. | VE |
|------------|------|------|--|-------------|-------------|-----|
| M12 | 11.0 | 1.5 | | 90.8112.070 | 121 932 409 | 100 |
| M16 | 13.0 | 1.5 | | 90.8112.096 | 121 932 509 | 100 |
| M20 | 17.0 | 1.5 | | 90.8112.134 | 121 932 609 | 100 |
| M25 | 22.0 | 1.8 | | 90.8112.025 | 121 932 709 | 100 |
| M32 | 28.0 | 2.0 | | 90.8112.032 | 121 932 809 | 100 |
| M40 | 37.0 | 2.0 | | 90.8112.040 | 121 932 909 | 100 |
| M50 | 48.0 | 2.0 | | 90.8112.050 | 121 932 919 | 50 |
| M63 | 55.0 | 2.5 | | 90.8112.487 | 121 932 929 | 50 |
| M75 | 68.0 | 2.6 | | 90.8112.075 | 121 932 939 | 50 |