



# QUICK-TUBE SHR PA V0

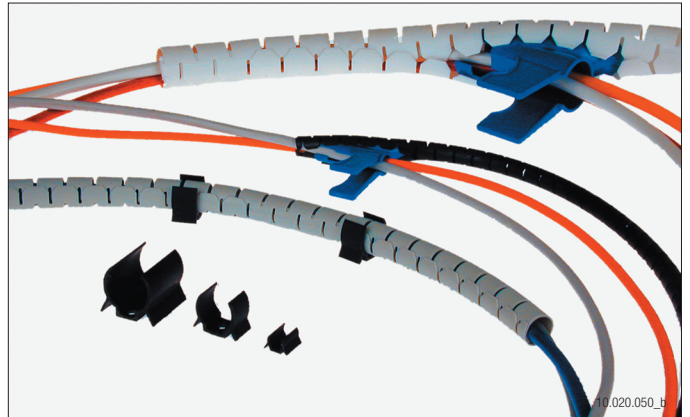

**MAT**

PA 6

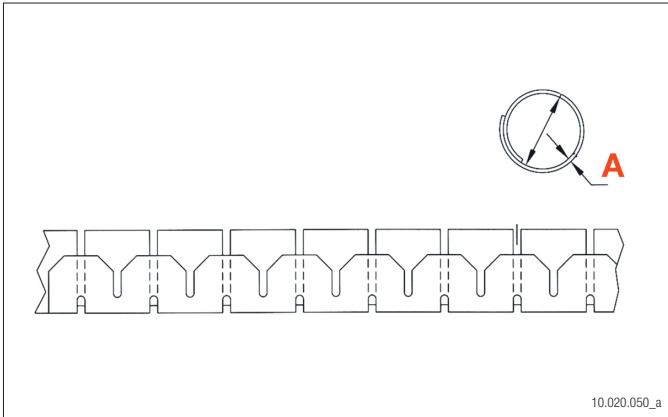

**TEMP**

-40°C bis +65°C  
-40°C à +65°C  
-40°C to +65°C



selbstverlöschend UL 94 V0  
auto-extinguible UL 94 V0  
self-extinguishing UL 94 V0

**RoHS**

**UV**

UV-beständig  
UV-résistant  
UV-resistant

## QUICK-TUBE SHR PA V0 «Kabelfresser»

Geschlitztes Spiralband zur erleichterten Montage mittels Spezialwerkzeug.

## QUICK-TUBE SHR PA V0 «avaleur de câble»

Ruban spirale fendu pour faciliter le montage par moyen d'un outil spécial.

## QUICK-TUBE SHR PA V0 «cable-eater»

Sitted spiral band for easier installation through a special tool.

NORM NW/DN	Ø max.mm	A mm			Plica-Nr.	E-Nr.	VE
8	10	0.8			80.2002.308	120 070 279	100
15	16	0.8			80.2002.315	120 071 179	50
20	23	0.9			80.2002.320	120 071 979	30
25	25	1.0			80.2002.325	120 072 579	20
32	32	1.3			80.2002.332	120 073 279	15