


recessed ceiling spot  
**Artikel-Nr. 02300003**

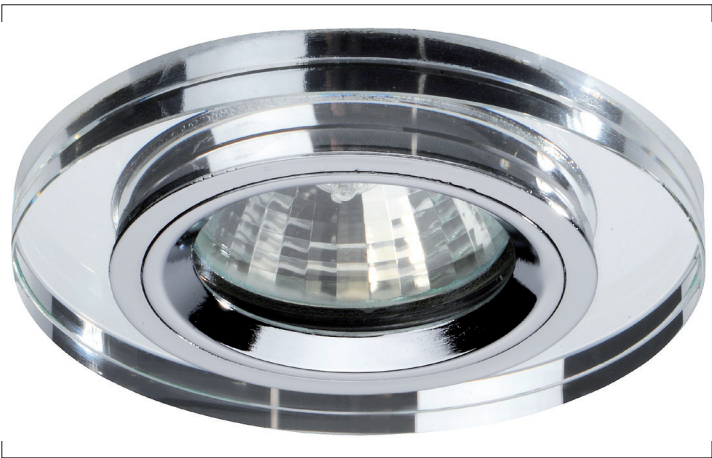

Deckeneinbauleuchte, round. In a compact design, for installation in tool-less rapid assembly systemsLamp holder: GX5.3, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Voltage: 12V, Power: 35W, Amount of light sources / fittings: 1.0 Qty, Adjustability: Not adjustable, With control gear: No, control: Other.

|             |                  |
|-------------|------------------|
| Artikel-Nr. | 02300003         |
| Stand:      | 20.07.2021 16:13 |

|                                    |           |
|------------------------------------|-----------|
| Amount of light sources / fittings | 1 Qty     |
| control                            | Other     |
| Outer diameter                     | 89 mm     |
| Built-in diameter                  | 68 mm     |
| Installation depth                 | 60 mm     |
| Material                           | Aluminium |
| Height                             | 10 mm     |
| Lamp holder                        | GX5.3     |

|                      |                     |
|----------------------|---------------------|
| Power                | max. 35 W           |
| Voltage              | 12V                 |
| Lamp                 | LV halogen lamp     |
| Circuit type         | Parallel conduction |
| Degree of protection | IP20                |
| Protection class     | III                 |
| Voltage type         | AC/DC               |
| Adjustability        | Not adjustable      |