


recessed ceiling spot
Artikel-Nr. 02300005

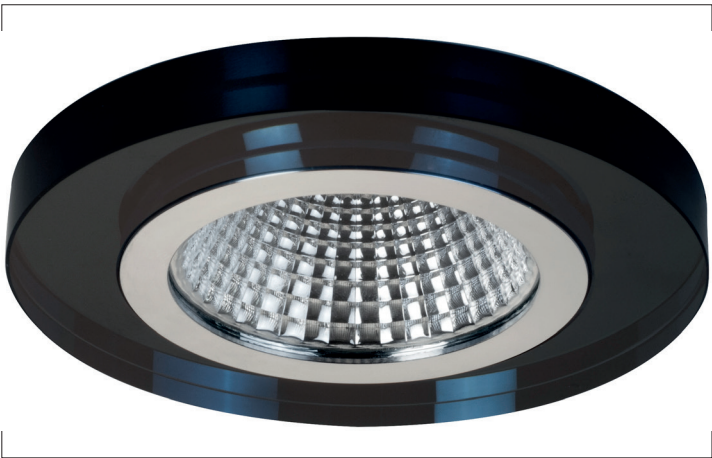

Deckeneinbauleuchte, round. In a compact design, for installation in tool-less rapid assembly systemsLamp holder: GX5.3, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Voltage: 12V, Power: 35W, Amount of light sources / fittings: 1.0 Qty, Adjustability: Not adjustable, With control gear: No, control: Other.

Artikel-Nr.	02300005
Stand:	21.07.2021 01:40

Amount of light sources / fittings	1 Qty
control	Other
Outer diameter	89 mm
Built-in diameter	68 mm
Installation depth	60 mm
Material	Aluminium
Height	10 mm
Lamp holder	GX5.3

Power	max. 35 W
Voltage	12V
Lamp	LV halogen lamp
Circuit type	Parallel conduction
Degree of protection	IP20
Protection class	III
Voltage type	AC/DC
Adjustability	Not adjustable