


LED-recessed spot
Artikel-Nr. 12106063

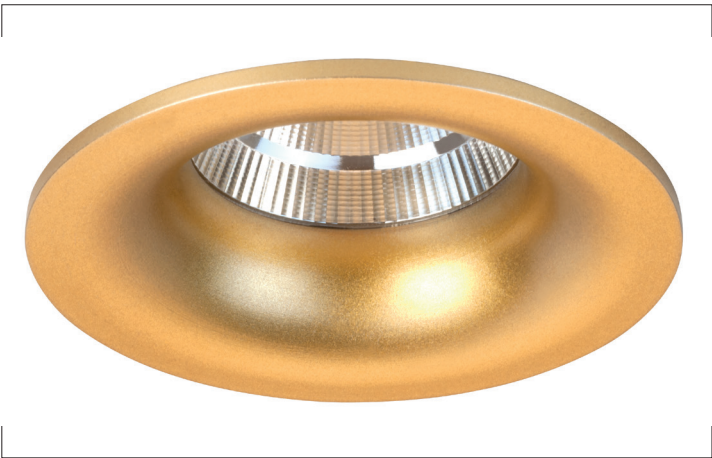

LED-Einbaudownlight, gold matt, round. In a compact design, for installation in tool-less rapid assembly systems Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Current: 500 mA, Power: 10W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 800lm, Colour temperature: 3000 K, Light colour : White, Beam angle: 32°, Adjustability: Not adjustable, With control gear: No. This luminaire contains incorporated and non-exchangeable LED light sources.

Artikel-Nr.	12106063
Stand:	19.07.2021 21:48

Colour of light	3000 K
Colour	Gold
Beam angle	32 °
Amount of light sources / fittings	1 Qty
Material	Aluminium
Power	10 W
Lamp	LED
Colour rendering	CRI > 90
Outer diameter	82 mm

Built-in diameter	74 mm
Installation depth	48 mm
Current	500 mA
Luminous flux	800 lm
Degree of protection	IP20
Protection class	III
Adjustability	Not adjustable
Circuit type	Series conduction