



LED flex lighting
Artikel-Nr. 75523002

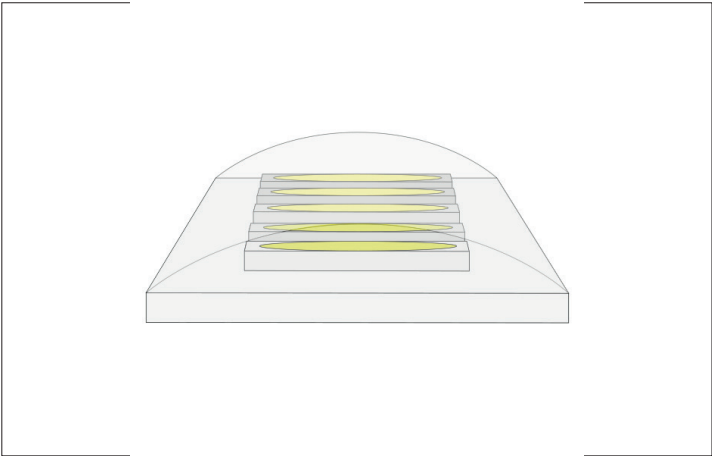

LED flex lighting, multi-coloured. LED flex lighting for decorative, technical as well as efficient lighting of light coves, linear applications and backlighting, basic or general lighting of rooms, architectural applications and for areas where high illumination is required, such as indirect or direct lighting, luminous ceilings, gastronomy lighting and much more. Länge: 100.0 mm Lampenleistung je Meter: 17.0 W/m, Schutzart raumseitig: IP60, Schutzklasse: III, Spannung: 24V DC, Abstrahlwinkel: 120.0 °, 120 LEDs pro Meter, Chip-Abstand (Short Pitch) : 16,7mm. Zur Individuellen Anwendung kann die LED-Flexplatine alle 100 mm eingekürzt werden. Bei Kürzung der LED-Flexplatine muss der IP-Schutz bauseits wiederhergestellt werden. Die maximale Systemlänge von 5.000mm darf mit einer Einspeisung nicht überschritten werden. This luminaire contains incorporated and non-exchangeable LED light sources.

Artikel-Nr.	75523002
Stand:	06.12.2021 12:25

Colour	Multi-coloured
Length	100 mm
Beam angle	120 °
Amount of light sources / fittings	12 Qty
Lamp	LED
scope of delivery	inkl. 1 x Montageanleitung
Control	Dimming depending on driver

Voltage	24V
Degree of protection	IP60
Protection class	III
Length	100 mm
Width	10 mm
Aufbauhöhe	3.2 mm
Circuit type	Parallel conduction