



QualityFlex Select flex lighting 50 mm, CRI > 90, 9,6 W / m, IP60
Artikel-Nr. 75222003

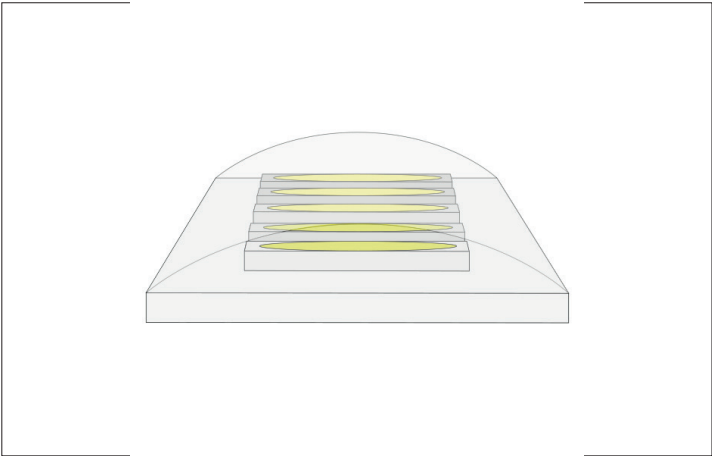

QualityFlex Select flex lighting 50 mm, CRI > 90, 9,6 W / m, IP60, white, 3.100K, CRI > 90. LED flex lighting for decorative, technical as well as efficient lighting of light coves, linear applications and backlighting, basic or general lighting of rooms, architectural applications and for areas where high illumination is required, such as indirect or direct lighting, luminous ceilings, gastronomy lighting and much more. Länge: 50.0 mm Lampenleistung je Meter: 9.6 W/m, Lichtstrom je Meter: 330.0 lm/m, Schutzart raumseitig: IP60, Schutzklasse: III, Spannung: 24V DC, Abstrahlwinkel: 120.0 °, 120 LEDs pro Meter, Chip-Abstand (Short Pitch) : 8,3mm. Zur Individuellen Anwendung kann die LED-Flexplatine alle 50 mm eingekürzt werden. Die maximale Systemlänge von 5.000mm darf mit einer Einspeisung nicht überschritten werden. This luminaire contains incorporated and non-exchangeable LED light sources.

Artikel-Nr.	75222003
Stand:	06.12.2021 12:17
Colour temperature	3100 K
Colour	White
Length	50 mm
Beam angle	120 °
Amount of light sources / fittings	600 Qty
Lamp	LED
scope of delivery	Including connecting cable on one side, length 350 mm
Control	Dimming depending on driver
Voltage	24V
Degree of protection	IP60
Protection class	III
Length	50 mm
Width	8 mm
Aufbauhöhe	2.8 mm
Circuit type	Parallel conduction