



QualityFlex Select flex lighting 100 mm, CRI > 90, 14,4 W / m, IP67
Artikel-Nr. 75273004

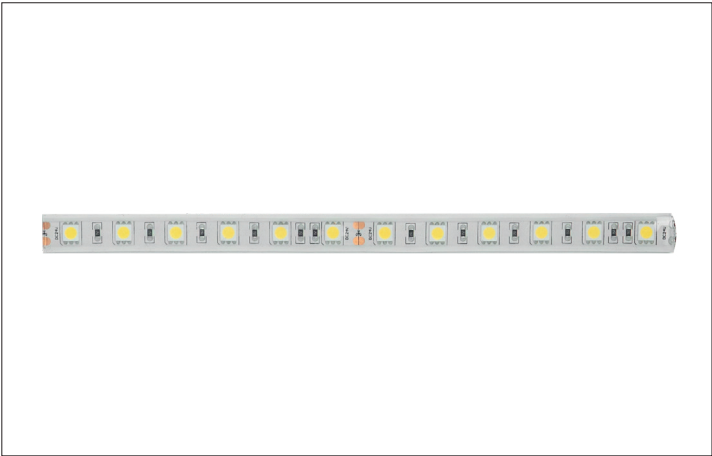

QualityFlex Select flex lighting 100 mm, CRI > 90, 14,4 W / m, IP67, white, 4.100K, CRI > 90. LED flex lighting for decorative, technical as well as efficient lighting of light coves, linear applications and backlighting, basic or general lighting of rooms, architectural applications and for areas where high illumination is required, such as indirect or direct lighting, luminous ceilings, gastronomy lighting and much more. Länge: 100.0 mm Lampenleistung je Meter: 14.4 W/m, Lichtstrom je Meter: 1080.0 lm/m, Schutzart raumseitig: IP67, Schutzklasse: III, Spannung: 24V DC, Abstrahlwinkel: 120.0 °, 60 LEDs pro Meter, Chip-Abstand (Short Pitch) : 16,7mm. Zur Individuellen Anwendung kann die LED-Flexplatine alle 100 mm eingekürzt werden. Bei Kürzung der LED-Flexplatine muss der IP-Schutz bauseits wiederhergestellt werden. Die maximale Systemlänge von 5.000mm darf mit einer Einspeisung nicht überschritten werden. This luminaire contains incorporated and non-exchangeable LED light sources.

Artikel-Nr.	75273004
Stand:	06.12.2021 12:26

Colour temperature	4100 K
Colour	White
Length	100 mm
Beam angle	120 °
Amount of light sources / fittings	6 Qty
Lamp	LED
scope of delivery	Including connecting cable on one side, length 350 mm

Voltage	24V
Degree of protection	IP67
Protection class	III
Length	100 mm
Width	12.7 mm
Aufbauhöhe	4.8 mm
Circuit type	Parallel conduction