



QualityFlex Select flex lighting 50 mm, CRI > 90, 9,6 W / m, IP67
Artikel-Nr. 75272004

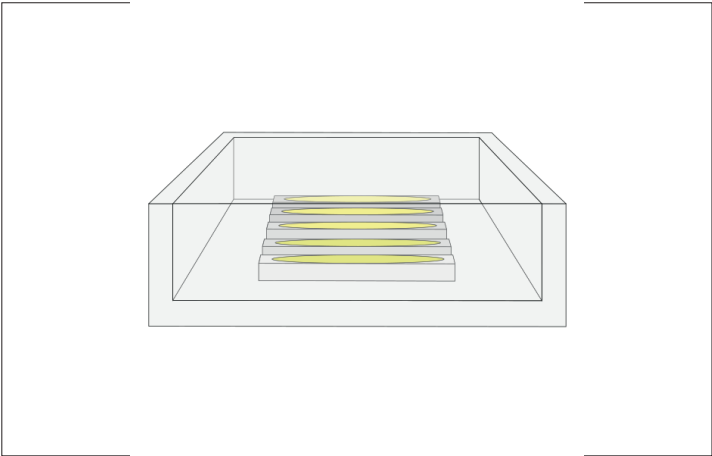

QualityFlex Select flex lighting 50 mm, CRI > 90, 9,6 W / m, IP67, white, 4.000K, CRI > 90. LED flex lighting for decorative, technical as well as efficient lighting of light coves, linear applications and backlighting, basic or general lighting of rooms, architectural applications and for areas where high illumination is required, such as indirect or direct lighting, luminous ceilings, gastronomy lighting and much more. Länge: 50.0 mm Lampenleistung je Meter: 9.6 W/m, Schutzart raumseitig: IP67, Schutzklasse: III, Spannung: 24V DC, Abstrahlwinkel: 120.0 °, 120 LEDs pro Meter, Chip-Abstand (Short Pitch) : 8,3mm. Zur Individuellen Anwendung kann die LED-Flexplatine alle 50 mm eingekürzt werden. Bei Kürzung der LED-Flexplatine muss der IP-Schutz bauseits wiederhergestellt werden. Die maximale Systemlänge von 5.000mm darf mit einer Einspeisung nicht überschritten werden. This luminaire contains incorporated and non-exchangeable LED light sources.

Artikel-Nr.	75272004
Stand:	06.12.2021 12:01

Colour temperature	4000 K	Control	Dimming depending on driver
Colour	White	Voltage	24V
Length	50 mm	Degree of protection	IP67
Beam angle	120 °	Protection class	III
Amount of light sources / fittings	6 Qty	Length	50 mm
Lamp	LED	Width	11 mm
scope of delivery	Including connecting cable on one side, length 350 mm	Aufbauhöhe	4.8 mm
		Circuit type	Parallel conduction