
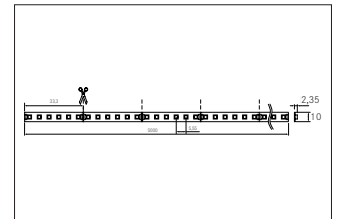


QualityFlex Special Applications, Food, 14,4 W / m, IP00  
**Artikel-Nr. 75203030**

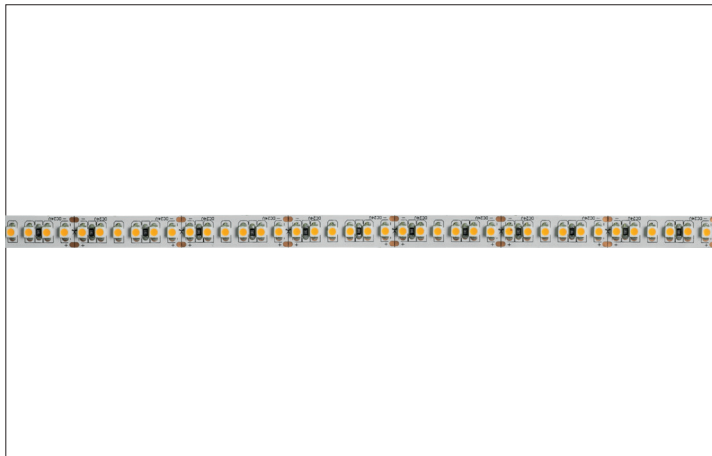

QualityFlex Special Applications, Food, 14,4 W / m, IP00, white, 3.050K. LED flex lighting for decorative, technical as well as efficient lighting of light covers, linear applications and backlighting, basic or general lighting of rooms, architectural applications and for areas where high illumination is required, such as indirect or direct lighting, luminous ceilings, gastronomy lighting and much more. Länge: 5000.0 mm Lampenleistung je Meter: 14.4 W/m, Schutzart raumseitig: IP00, Schutzklasse: III, Spannung: 24V DC, Abstrahlwinkel: 120.0 °, 180 LEDs pro Meter, Chip-Abstand (Short Pitch) : 5,55mm. Zur Individuellen Anwendung kann die LED-Flexplatine alle 33,33 mm eingekürzt werden. Die maximale Systemlänge von 5.000mm darf mit einer Einspeisung nicht überschritten werden.

<b>Artikel-Nr.</b>	<b>75203030</b>
<b>Stand:</b>	06.12.2021 12:36

Colour temperature	3050 K
Colour	White
Length	5,000 mm
Beam angle	120 °
Amount of light sources / fittings	900 Qty
Power	72 W
Lamp	LED
scope of delivery	Including connecting cable on one side, length 350 mm

Control	Dimming depending on driver
Voltage	24V
Degree of protection	IP00
Protection class	III
Length	33.3 mm
Width	10 mm
Aufbauhöhe	2.4 mm
Circuit type	Parallel conduction